

D

C

B

A

D

C

TITLE:

DWG NO:




REV:

SH:


OF:

LENGTH TABLE	
PART NUMBER	LENGTH (METERS)
ATHD06-1-8S-8G-M1	1 (3.28FT)
ATHD06-1-8S-8G-M2	2 (6.56FT)
ATHD06-1-8S-8G-M4	4 (13.12FT)
ATHD06-1-8S-8G-M5	5 (16.40FT)
ATHD06-1-8S-8G-M10	10 (32.80FT)

PLEASE CONTACT CSR FOR ADDITONAL AVAILABLE OPTIONS

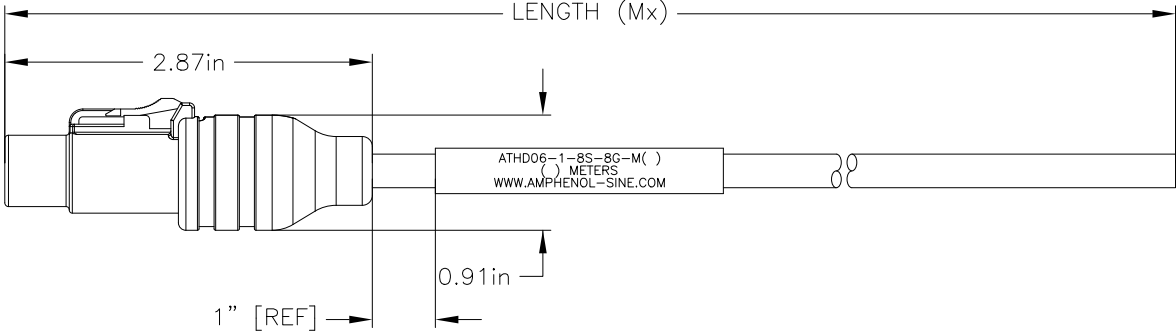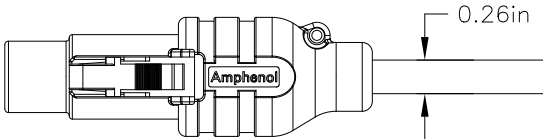

WIRING DIAGRAM




NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
HOUSING: PA66
SEAL: SILICONE RUBBER
- MODIFICATIONS: OVERMOLDED (PA)
- CONNECTOR SPECIFICATIONS:
3.1 CURRENT RATING: 75AMPS
3.2 CABLE ASSEMBLY OPERATING TEMPERATURE: -40 TO +100C
3.3 CONTACT: COPPER ALLOY, NICKEL PLATED
3.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
3.5 INSULATION RESISTANCE: 1000 MEGAOHMS MIN @ 25C
3.6 MOISTURE RESISTANCE: IP68 MATED CONDITION (1M OF WATER FOR 24 HOURS).
3.7 MATING CYCLE DURABILITY: 100 CYCLES
3.8 RoHS COMPLIANT

- CABLE SPECIFICATIONS:
COMPONENTS: ONE 8AWG, PVC INSULATED CONDUCTOR
133/29 BARE COPPER,UL1028
JACKET: PVC, BLACK
600V AC/DC
- APPROVALS:
UL TYPE AWM, STYLE 1028.
CSA TYPE TEW.
OIL RESISTANT I
SUN RESISTANT I
FT1 FLAME RATING
ROHS COMPLIANT.
- MATING PART: ____* ATHD04-1-8P RECEPTACLE.
MATING CABLE ASSEMBLY: ATHD04-1-8P-8G-Mx
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

REVISIONS						
REV	ZONE	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	-	RELEASED	3/31/2022	RO	WS

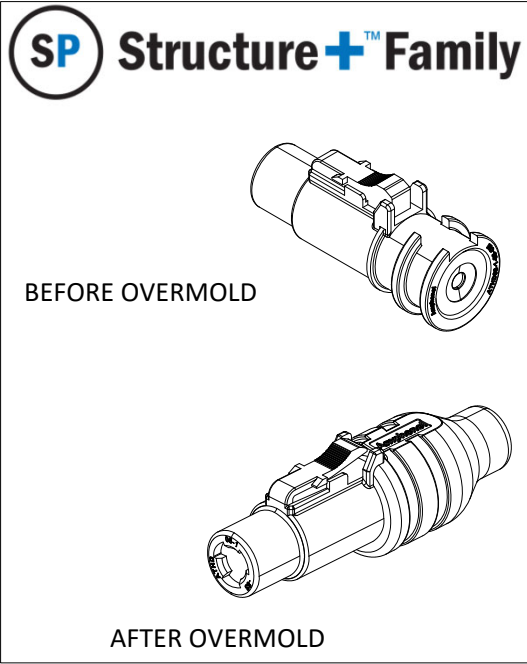

QUANTITY	PART NUMBER	DESCRIPTION		ITEM												
MATERIALS LIST																
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 3) Note reference = 		SIGNATURES DRAWN: RO CHECKED: WS ENGINEER: RO APPROVAL: WS CUSTOMER: THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	DATE 2/25/2022 3/22/2022 3/24/2022	Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036 1 POS PLUG SZ 8 MOLDED, SOCKET SIZE 8, 8AWG, SINGLE-ENDED WIRED ASSY, AMPHENOL ATHD CONNECTOR ATHD06-1-8S, X METERS <table><tr><td>SIZE</td><td>TYPE</td><td>DWG NO:</td><td>REVISION</td></tr><tr><td>C</td><td>C-</td><td>ATHD06-1-8S-8G-Mx</td><td>A1</td></tr><tr><td>SCALE:</td><td colspan="3">NONE</td></tr></table>	SIZE	TYPE	DWG NO:	REVISION	C	C-	ATHD06-1-8S-8G-Mx	A1	SCALE:	NONE		
SIZE	TYPE	DWG NO:	REVISION													
C	C-	ATHD06-1-8S-8G-Mx	A1													
SCALE:	NONE															
MATERIAL SPECIFICATIONS:																
PROCESS SPECIFICATIONS:																
NEXT ASSY:																
Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036 <table><tr><td>ATHD06-1-8S-8G-Mx</td><td>SHEET</td><td>1</td><td>OF</td><td>1</td></tr></table>					ATHD06-1-8S-8G-Mx	SHEET	1	OF	1							
ATHD06-1-8S-8G-Mx	SHEET	1	OF	1												