


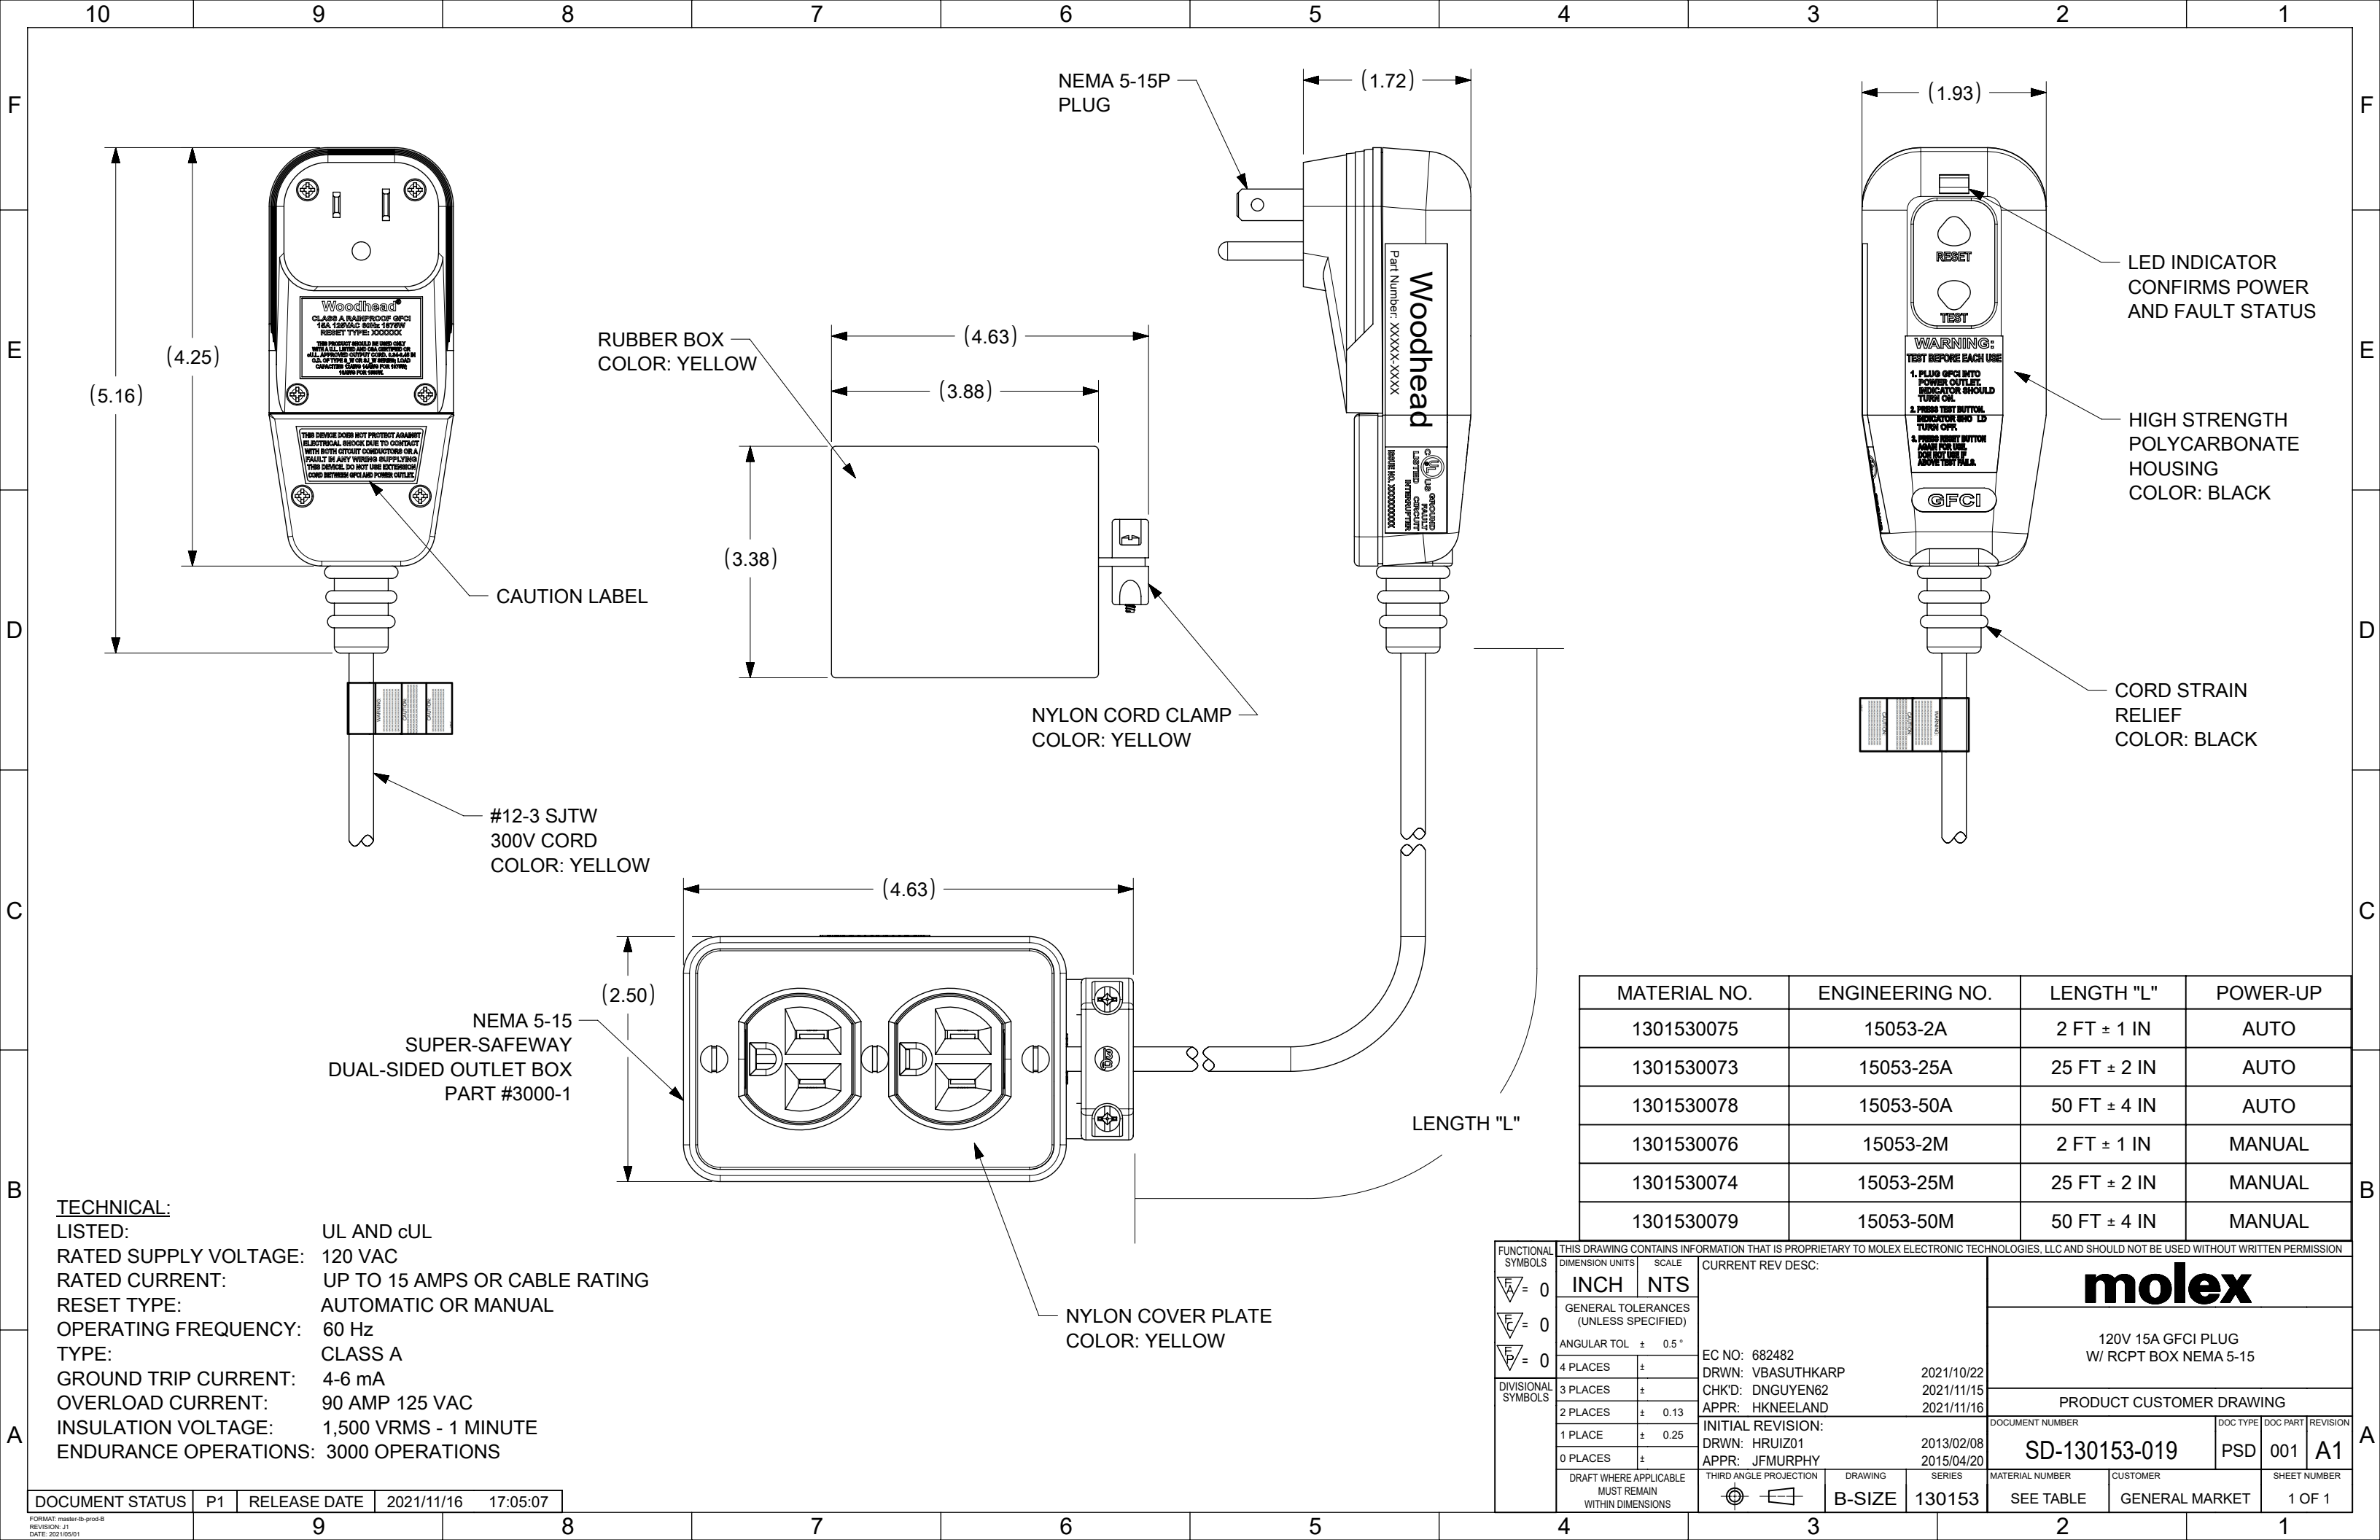

TECHNICAL:
LISTED: UL AND cUL
RATED SUPPLY VOLTAGE: 120 VAC
RATED CURRENT: UP TO 15 AMPS OR CABLE RATING
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 4-6 mA
OVERLOAD CURRENT: 90 AMP 125 VAC
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	POWER-UP
1301530075	15053-2A	2 FT ± 1 IN	AUTO
1301530073	15053-25A	25 FT ± 2 IN	AUTO
1301530078	15053-50A	50 FT ± 4 IN	AUTO
1301530076	15053-2M	2 FT ± 1 IN	MANUAL
1301530074	15053-25M	25 FT ± 2 IN	MANUAL
1301530079	15053-50M	50 FT ± 4 IN	MANUAL

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC:					molex 120V 15A GFCI PLUG W/ RCPT BOX NEMA 5-15							
	INCH		NTS														
	GENERAL TOLERANCES (UNLESS SPECIFIED)																
	ANGULAR TOL ± 0.5 °																
DIVISIONAL SYMBOLS	4 PLACES		±		EC NO: 682482					PRODUCT CUSTOMER DRAWING							
	3 PLACES		±		DRWN: VBASUTHKARP 2021/10/22												
	2 PLACES		± 0.13		CHK'D: DNGUYEN62 2021/11/15												
	1 PLACE		± 0.25		APPR: HKNEELAND 2021/11/16												
	0 PLACES		±		INITIAL REVISION:					DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
						B-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1			
										SD-130153-019		PSD		001		A1	

DOCUMENT STATUS	P1	RELEASE DATE	2021/11/16	17:05:07
-----------------	----	--------------	------------	----------