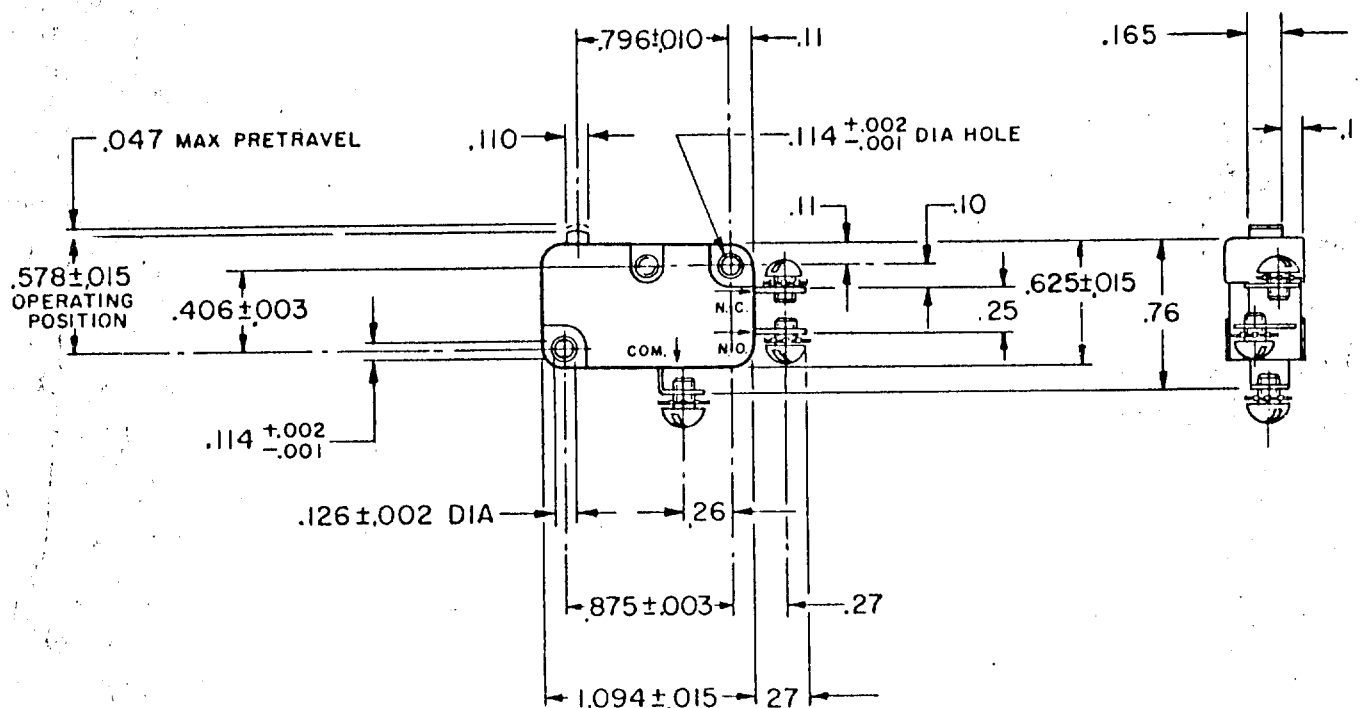
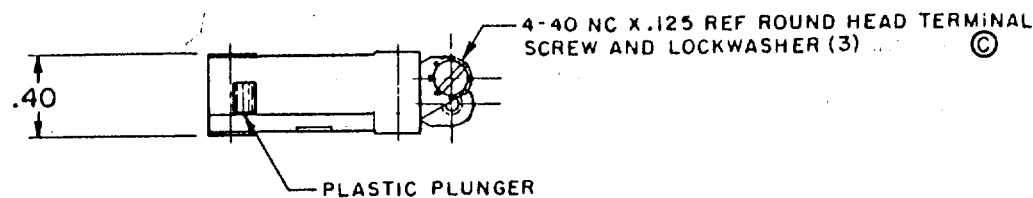


**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC**V 3-1****CK-A0100****5**

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 6-14 OZ

RELEASE FORCE — — — 4 OZ MIN

DIFFERENTIAL TRAVEL — — .006 — .016

OVERTRAVEL — — — .040 MIN

FREE POSITION — — — .625 MAX

RELEASE TRAVEL — — — .007 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

L83

15.1A 1/2HP 125 OR 250 VAC

1/2A 125 VDC, 1/4A 250 VDC

5A 125 VAC "L"

**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT .017 LB

REPLACES

RELEASE NO.

DRAWING NUMBER

CHECK PFK

CHECK PFK

CHECK PFK

CHECK PFK

CHECK PFK

CHECK PFK

CHECK PFK

CHECK PFK

CHECK PFK

CHECK PFK

DRAWN

M B F

FC-50378