

Han 300A crimp module, male

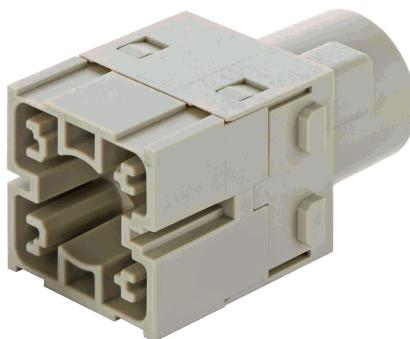


Image is for illustration purposes only. Please refer to product description.

Identification

Category	Modules
Series	Han-Modular®
Type of module	Han® 300 A module
Size of the module	Double module

Version

Termination method	Crimp termination Axial screw termination
Gender	Male
Number of contacts	1
Details	Please order contacts separately.

Technical characteristics

Conductor cross-section	95 ... 120 mm ²
Rated current	300 A
Rated voltage	1,000 V
Rated voltage	1,000 V AC 1,300 V DC
Rated impulse voltage	8 kV
Pollution degree	3
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥500
---------------	------

Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Not contained
Fire protection on railway vehicles	EN 45545-2 (2020-08)
Requirement set with Hazard Levels	R22 (HL 1-3) R23 (HL 1-3)

Specifications and approvals

Specifications	EN 50124-1 EN 60664-1 IEC 61984
----------------	---------------------------------------

Commercial data

Packaging size	1
Net weight	25 g
Country of origin	Germany
European customs tariff number	85366990
eCl@ss	27440217 Module for industrial connectors (power/signals)