

MICRO SWITCHFREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V3L-389**CQ-E0265****V3L-389****M**DRAWING
NUMBER

ISSUE

5

8

REPLACES

RELEASE NO. PR-1876

CHECK

REVISIONS

A

C031748

L S D

26 MAR 73

C

59921

BMA

29 SEPT 86

C

CO-76298

J A K

11 NOV 93

D

0004293

KSR

26 APR 04

CHECK

71

MAY

DRAW

71

CHECK

71

MAY

DRAW

71

CHECK

71

MAY

DRAW

71

CHECK

71

MAY

DRAW

71



CHECK

71

MAY

DRAW

71

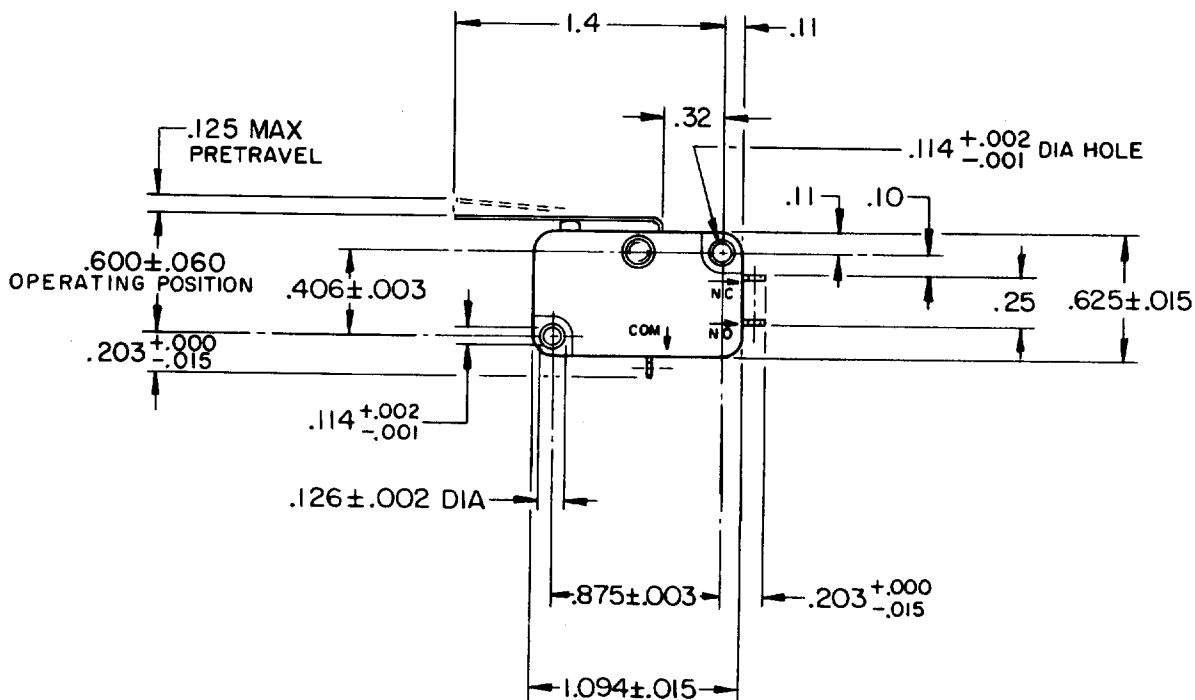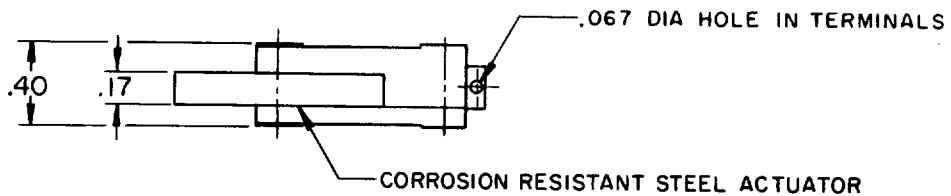

NOTE-

1 - TERMINALS ARE SOLDER PLATED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 4 OZ MAX

RELEASE FORCE - - - - - 1/2 OZ MIN

DIFFERENTIAL TRAVEL - - - - .050 MAX

OVERTRAVEL - - - - - .090 MIN

RELEASE TRAVEL - - - - - .017 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T- L156 - 11A-1/3HP-125-250-277 VAC
1/2A-125 VDC; 1/4A-250 VDC
4A-125 VAC "L"

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT