

Heat Shrink Tubing

Primary Product Color: **Black**Wall Type: **Single Wall**Expanded Inside Diameter (Min): **13.72 mm [.54 in]**Recovered Inside Diameter (Max): **6.35 mm [.25 in]**Shrink Ratio: **2:1**

Features

Product Type Features

Wall Type

Single Wall

Electrical Characteristics

Operating Voltage (Max)

.6 kV

Body Features

Fluid Type

Aviation Fuel, Chemicals/Solvents, De-Icing Fluid, Hydraulic Fluid, Lubricating Oil, Water

Primary Product Color

Black

Shrink Ratio

2:1

Primary Product Material

Irradiated Modified Polyolefin

Flexibility

Very Flexible

Dimensions

Recovered Wall Thickness (Tolerance)

.08 mm[.003 in]

Recovered Wall Thickness (Nominal)

.64 mm[.025 in]

Expanded Inside Diameter (Min)

13.72 mm[.54 in]

Recovered Inside Diameter (Max)

6.35 mm[.25 in]

Tubing Size Range

6.4 - 13.72 mm[.25 - .54 in]

Usage Conditions

Shrink Temperature (Min)	70 °C
Tubing Flammability Type	Highly Flame-Retardant
Operating Temperature Range	-55 - 135 °C
Recovery Temperature	90 °C

Operation/Application

Mechanical Resistance	Fluids, Strain Relief, Wrinkling
-----------------------	----------------------------------

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

Packaging Method	Reel
------------------	------

Other

Meets Low Outgassing Requirements	No
Product Source	Czech Republic

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides


on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # EG1114-000
CV1981-ST-230V1600W-EU

Also in the Series | RAYCHEM Versafit

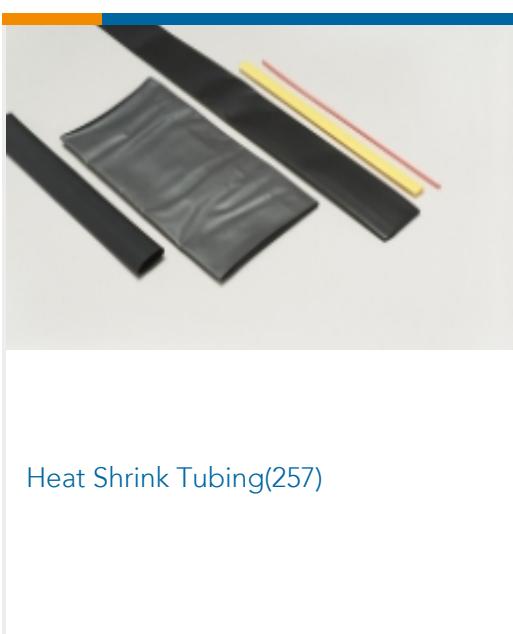

Heat Shrink Tubing(257)

Customers Also Bought



TE Part # 8-1609095-9
2FB3-F8361



TE Part # 91572-1
CCII TYPE II REC 26-22 ASSY



TE Part # 87977-4
12 MODIV HSG DR MRKD .100 POL



TE Part # NB17304001
RP-4800-NO.1-0-SP



TE Part # NB14474001
VERSAFIT-3/8-0-FSP



TE Part # NB17694001
VERSAFIT-1-1/2-0-SP



TE Part # NB20034001
VERSAFIT-1/4-0-SP

Documents

Product Drawings

VERSAFIT-1/2-0-FSP

English

Datasheets & Catalog Pages

[VERSAFIT Pages from 9-1773447-9](#)

English

Product Specifications

[Application Specification](#)

English