

2337994-3  ACTIVE

### Industrial RJ45 Mag Jack

TE Internal #: 2337994-3

RJ45 Connectors, RJ45 with Integrated Magnetics, Multiple Ports, 1

x 2, RJ Type Jacks & Plugs, Industrial RJ45 Mag Jack

[View on TE.com >](#)



Connectors > Modular Jacks & Plugs > RJ45 Connectors



Modular Jack & Plug Interface Type: **RJ45 with Integrated Magnetics**

Port Configuration: **Multiple Ports**

Port Matrix Configuration: **1 x 2**

Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**

Connector Contact Density: **Standard**

## Features

### Product Type Features

Modular Jack & Plug Interface Type	RJ45 with Integrated Magnetics
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Grounding Options	PCB and Panel Ground
Connector & Contact Terminates To	Printed Circuit Board

### Configuration Features

Panel Ground Location	Top and Side
Number of Panel Ground Tabs	7
Number of PCB Ground Tabs	2
Multiple Port Configuration	Ganged
Port Configuration	Multiple Ports
Port Matrix Configuration	1 x 2
Connector Contact Density	Standard
Number of Positions	8
Number of Loaded Positions	8

PCB Mount Orientation

Right Angle

**Signal Characteristics**

Data Rate	10 Mb/s, 100 Mb/s
-----------	-------------------

**Body Features**

LED Color (Top Left)	Green
PCB Retention Feature Material	LCP
LED Color (Top Right)	Yellow
Insulator Material	LCP
Shield Plating Finish	Matte
PCB Ground Tab Location	3.05 mm[.12 in]
LED Color (Bottom Left)	None
LED Color (Bottom Right)	None
Shield Plating Material	Nickel
Shield Material	Brass
Modular Jack Latch Orientation	Inverted - Latch Up
Connector Profile	Standard

**Contact Features**

PCB Contact Termination Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material Thickness	.76 $\mu\text{m}$ [30 $\mu\text{in}$ ]

**Termination Features**

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

**Mechanical Attachment**

PCB Mount Retention Type	Boardlock
--------------------------	-----------

**Housing Features**

Mating Entry Location	Side
Housing Color	Black
Housing Material	LCP (Liquid Crystal Polymer)

**Dimensions**

Connector Height	13.5 mm[.531 in]
------------------	------------------

### Usage Conditions

Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]
-----------------------------	---------------------------

### Operation/Application

Indicator Type	LED
----------------	-----

Shielded	Yes
----------	-----

### Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Performance Category	Cat 5
----------------------	-------

### Packaging Features

Packaging Quantity	80
--------------------	----

Packaging Method	Reel
------------------	------

### Other

Shield Panel Ground Type	Shield has bottom panel grounds.
--------------------------	----------------------------------

### Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
--	---

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
-----------------	--

Solder Process Capability	Reflow solder capable to 260°C
---------------------------	--------------------------------

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 1987236-1  
RJ45 CONNECTOR IP20 45 DEG.,  
INDUSTRIAL

## Also in the Series | Industrial RJ45 Mag Jack




RJ45 Connectors(101)

## Customers Also Bought




TE Part # 2-1623730-5  
BCHE 4 W 6K8 5%

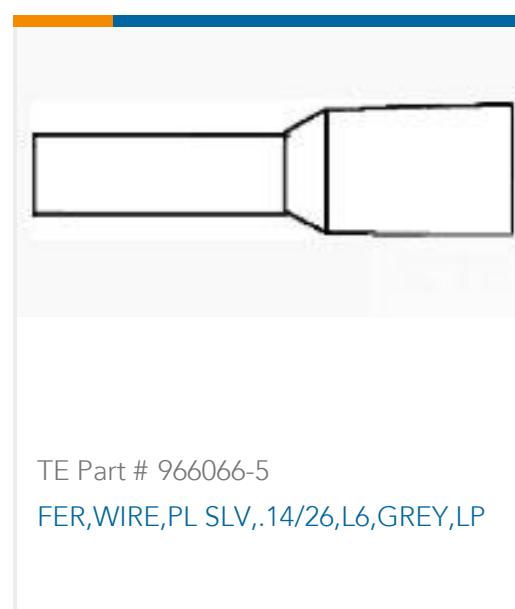

TE Part # 966066-5  
FER,WIRE,PL SLV.,14/26,L6,GRY,LP



TE Part # 160668-2  
110 FASTIN FASTON,REC.,20-16 AWG,  
PTBR

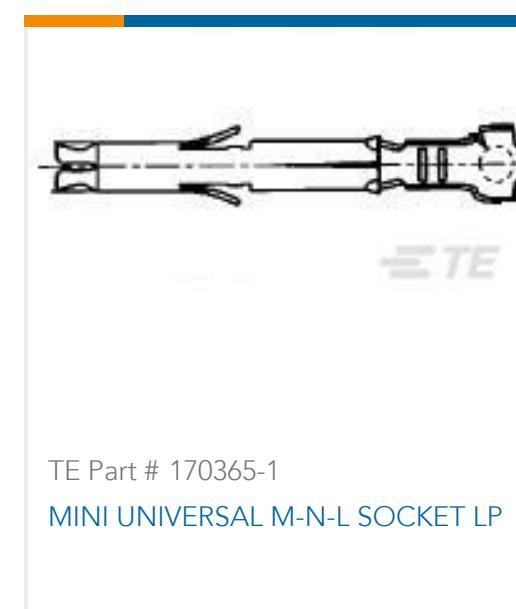

TE Part # 170365-1  
MINI UNIVERSAL M-N-L SOCKET LP



TE Part # 925387-1  
110 FASTON HSG. REC. 1P CLEAR



TE Part # 794831-1  
MINI UMNL SKT SN 22-18 AWG



TE Part # 1825910-6  
FSM4JH=6MM TACT SWITCH, HIGH  
TEMP



TE Part # 1SNA115657R2500  
M4/8.SF



## Documents

### Product Drawings

#### RJ45 JACK MAG. POE 10/100 LED 1X2 INV.

English

---

### CAD Files

#### 3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_2337994-3\\_A.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2337994-3\\_A.3d\\_jgs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2337994-3\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

#### ETHERNET JACKS WITH INTEGRATED MAGNETICS AND PoE

English

---

### Product Specifications

#### Application Specification

English