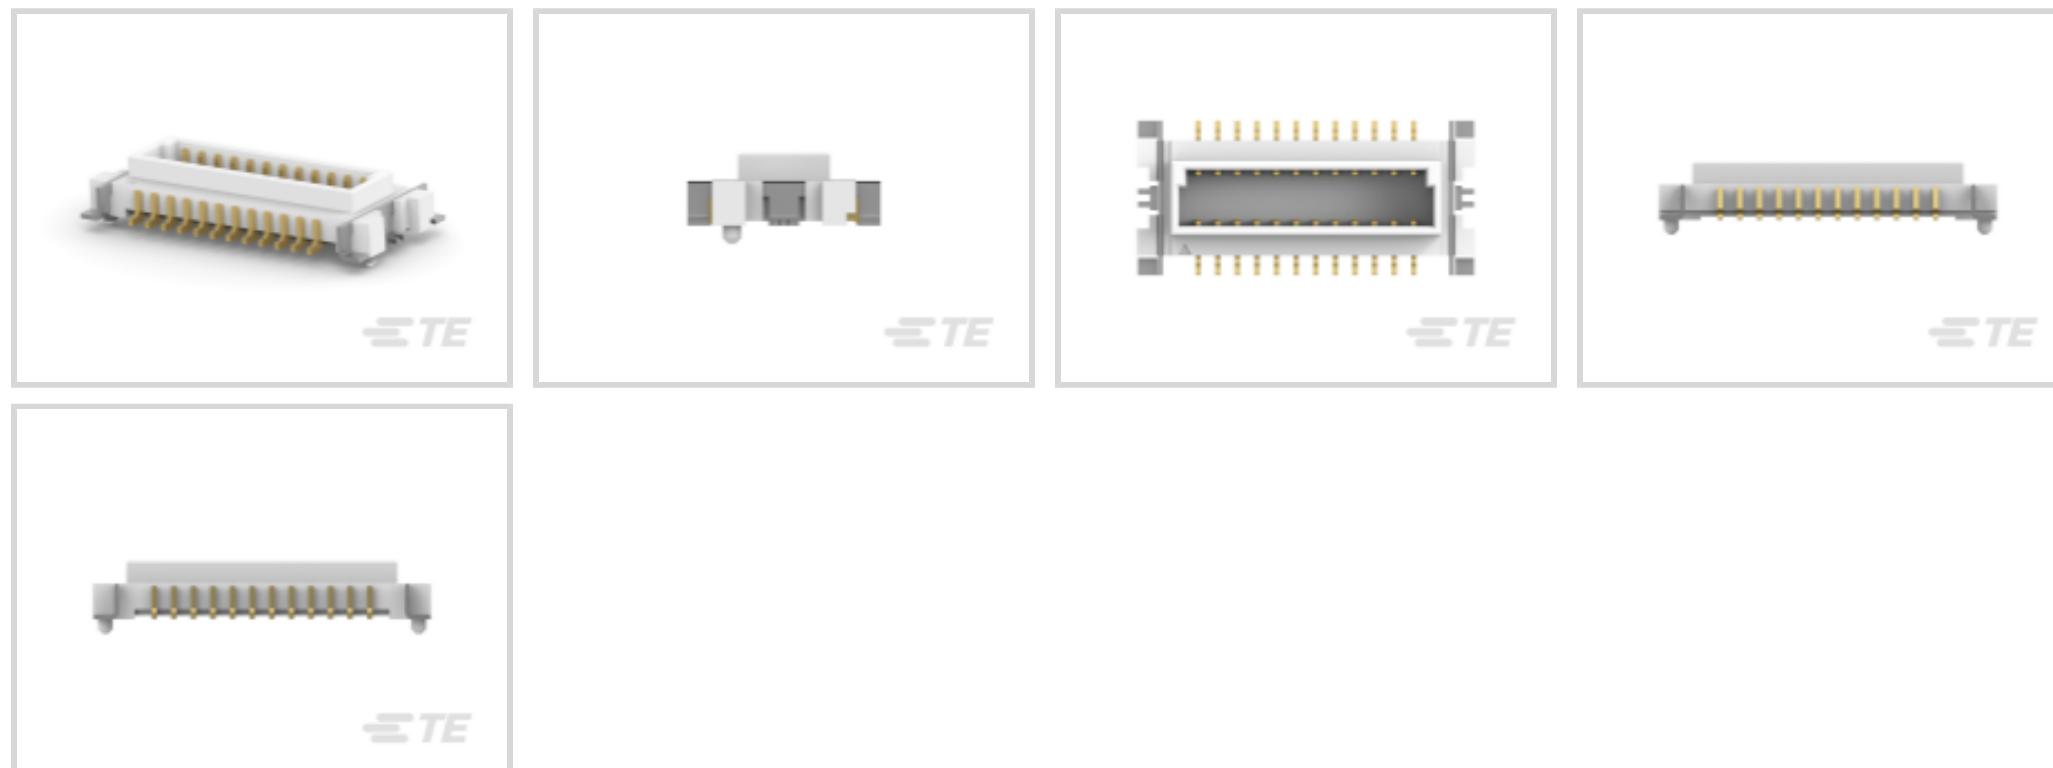


TE Internal #: 1775014-2

PCB Mount Header, Vertical, Board-to-Board, 24 Position, .8 mm [.031 in] Centerline, Gold Flash, Surface Mount, Signal, Natural, Tape & Reel

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles

PCB Connector Assembly Type: **PCB Mount Header**PCB Mount Orientation: **Vertical**Connector System: **Board-to-Board**Number of Positions: **24**Centerline (Pitch): **.8 mm [.031 in]**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	24
Board-to-Board Configuration	Parallel

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	500 VAC
Insulation Resistance	2 MΩ
Operating Voltage	50 VAC

Body Features

Assembly Process Feature Material	Mylar
Connector Profile	Low
Primary Product Color	Natural

Contact Features

PCB Contact Termination Area Plating Material Thickness	2.54 μ m[99.9998 μ in]
Contact Layout	Inline
Contact Shape & Form	Square
PCB Contact Termination Area Plating Material	Gold Flash
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold Flash
Contact Type	Tab
Contact Current Rating (Max)	.5 A

Termination Features

Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.7 mm[.028 in]
Termination Method to Printed Circuit Board	Surface Mount

Mechanical Attachment

PCB Mount Alignment Type	Locating Posts
PCB Mount Retention Type	None
Mating Alignment	With
Mating Alignment Type	Polarized
PCB Mount Retention	Without
PCB Mount Alignment	With
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	.8 mm[.031 in]
Housing Material	Nylon 6T

Dimensions

Connector Height	2.4 mm[.094 in]
Stack Height	3 mm[.118 in]

Usage Conditions

Housing Temperature Rating	High
----------------------------	------

Operating Temperature Range -25 - 85 °C[-13 - 185 °F]

Operation/Application

Assembly Process Feature	Pick and Place Cover
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	1500
Packaging Method	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1775013-2
0.8 BTB FS RCPT G/F 24P

Customers Also Bought

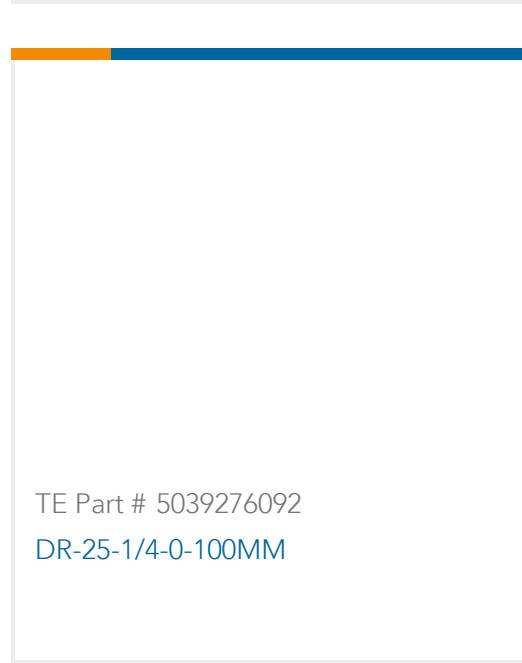TE Part # 0460-010-20141
PIN, SOLID, SIZE 20, 16-18AWG, NITE Part # 1-1622824-6
RL73H 3A R47 1% 4K RLTE Part # 2041262-1
Mini PCI-E 6.8H G/FTE Part # 31679
TERMINAL,DG R 26-22 4TE Part # 2176331-9
CRGP 2512 47R 1%TE Part # 1-2071567-1
ECK200HAAPATE Part # 2-6474640-6
FSN-11A-15TE Part # ANT-868-CW-HWR-SMA
Antenna 1/2 Wave Whip Swivel
868MHz SMATE Part # 5039276092
DR-25-1/4-0-100MM

Documents

Product Drawings

0.8 BTB FS 3H PLUG G/F 24P

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1775014-2_G.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1775014-2_G.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1775014-2_G.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Crimping of AMP Lattice Contact](#)

English

[Application Specification](#)

English