



Terminals & Splices > Automotive Terminals > AMP MCP, RECEPTACLE AND TAB



Terminal Type: **Receptacle**

Mating Tab Width: **1.5 mm [.059 in]**

Mating Tab Thickness: **.6 mm [.024 in]**

Terminal Transmits: **0 - 24 A (Low Power)**

Wire Size: **20 - 17 AWG**

[All AMP MCP, RECEPTACLE AND TAB \(123\)](#)

Features

Product Type Features

Receptacle Style	180°
Sealable	Yes
Primary Locking Feature	Locking Lance

Body Features

Terminal Seal Type	Single Wire Seal (SWS)
--------------------	------------------------

Contact Features

Contact Size	1.5K
Contact Fabrication	Stamped & Formed
Wire Contact Termination Area Plating Material	Tin
Typical Current Rating	12 A
Crimp Type	F-Crimp
Terminal Type	Receptacle
Mating Tab Width	1.5 mm[.059 in]
Mating Tab Thickness	.6 mm[.024 in]
Interface Plating	Silver (Ag)

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------



Product Terminates To	Wire
-----------------------	------

Dimensions

Compatible Insulation Diameter Range	1.4 - 2.1 mm[.055 - .083 in]
Wire Size	.5 - 1 mm ²
Wire Size Search	17 AWG, 18 AWG, 19 AWG, 20 AWG

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C[176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F]
Operating Temperature Range	-40 - 140 °C[-40 - 284 °F]

Operation/Application

Conforms to KOMAX Automatic Component Insertion Guideline	Yes, per Version 5.0 (March 2018)
Compatible With Wire Base Material	Copper

Industry Standards

Compatible With Agency/Standards Products	LV214
---	-------

Packaging Features

Packaging Quantity	4500
Packaging Method	Reel

Other

Terminal Transmits	0 - 24 A (Low Power)
--------------------	----------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC



Free

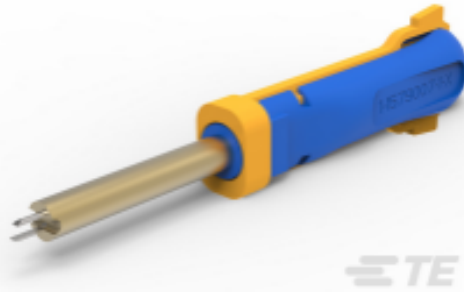


Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # CAT-H3399-CH8172 Heavy Duty Sealed Connector Series Housings	 TE Part # CAT-L489-CH8172 LEAVYSEAL Housings	 TE Part # 1-1579007-1 EXTRACTION TOOL	 TE Part # 964972-1 EINZELLEITERDICHUNG
 TE Part # 963530-1 EINZELLEITERDICHUNG	 TE Part # 2306960-1 3POS,AMP MCP 1.5K,REC HSG ASSY, SLD,COD A	 TE Part # CAT-AM705-CH8172 AMP MCP, SEALED CONNECTOR HOUSING	 TE Part # 1-2293551-1 62POS,MIXED,REC HSG,ASSY,SLD
 TE Part # 1579008-9 INSERTION TOOL	 TE Part # 2-2293551-1 62POS,MIXED,REC HSG,ASSY,SLD	 TE Part # 2063524-1 SDE MCP1.5 0.2-1.0mm2 ASSY	 TE Part # 2063524-2 SDE MCP1.5 0.2-1.0mm2 DIE SET



TE Part # 2151064-1 OCEAN_2.0_APPLICATOR-S-070F125O-RSM	TE Part # 2151064-2 OCEAN_2.0_APPLICATOR-S-070F125O-RSA	TE Part # 2305570-1 Strip Terminal Cutter-Side Feed-No Crimp	TE Part # 3-2293551-1 62POS,MIXED,REC HSG,ASSY,SLD
TE Part # 5-2151064-1 OCEAN_2.0_APPLICATOR-S-070F125O-RSM	TE Part # 5-2151064-2 OCEAN_2.0_APPLICATOR-S-070F125O-RSA	TE Part # 7-2151064-7 OCEAN_2.0_SPARE_PART_KIT-070F125O	TE Part # 7-2266050-7 OC-070F125O-752-CRIMPTOOLINGKIT

Also in the Series | AMP MCP Connector System

Automotive Connector Caps & Covers (23)	Automotive Connector Locks & Position Assurance(6)	Automotive Housings(329)	Automotive Terminals(129)
Connector Seals & Cavity Plugs(7)	Insertion & Extraction Tools(13)	Other Automotive Connector Accessories(2)	PCB Headers & Receptacles(28)

Customers Also Bought

TE Part # 929939-6 JPT REC 2.8 Contact SWS Ag	TE Part # 1241608-6 MQS1,5 Ag rec CB unseal. 0,75-1,5	TE Part # 828920-1 EINZELADERDICHTUNG	TE Part # 1801174-5 2W TAB HP CONNECTOR GREEN
--	--	--	--



TE Part # 1803143-2
CRIMPER, INSUL O



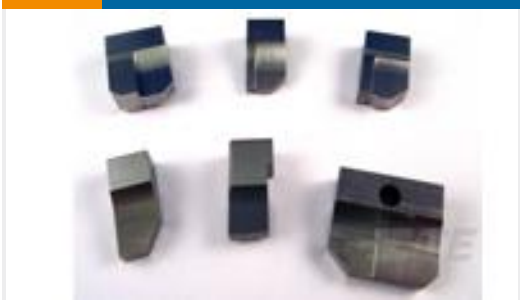
TE Part # 2-2141520-2
5POS, MCON 1.2 LL TAB SEALED
COD B



TE Part # 7-2151981-7
OCEAN_2.0_SPARE_PART_KIT-
062F125O



TE Part # 2-1803514-4
ANVIL, COMBINATION



TE Part # 6-653612-5
AMBOSS KP

Documents

Product Drawings

AMP MCP 1.5K, CONTACT, SWS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1241380-3_B_c-1241380-3-b.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1241380-3_B_c-1241380-3-b.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1241380-3_B_c-1241380-3-b.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

HDSCS Catalog

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English



Application Specification

German