


The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant.

1. INSULATOR: HIGH TEMPERATURE THERMOPLASTIC, LCP, UL 94V-0, COLOR- BLACK.
2. CONTACT: COPPER ALLOY, SELECTIVE GOLD PLATING ON CONTACT AREA, GOLD FLASH ON SOLDERING AREA, NICKEL PLATING 50u" THICKNESS MIN. OVERALL.
3. SHELL: STAINLESS STEEL, GOLD FLASH ON SOLDERING AREA. NICKEL PLATING 12u" THICKNESS MIN. OVERALL.
4. THIS PRODUCT IS HALOGEN-FREE PRODUCT.
5. PRODUCT SPECIFICATION REFER TO : PS-7584.
6. TEST SUMMARY REFER TO : TS-7584-001.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A	NE-17113	RELEASE TO PRODUCTION	05/25/2017	Roger Tso




ORIGINAL

PIN NUMBER	PIN ASSIGNMENT	PIN NUMBER	PIN ASSIGNMENT
1	DAT2	11	D0+
2	CD/DAT3	12	D0-
3	CMD	13	V _{ss}
4	V _{dd1}	14	D1-
5	CLK	15	D1+
6	V _{ss}	16	V _{ss}
7	DAT0	17	SWIO
8	DAT1	GEN	GROUND
9	V _{dd2}	CD	CD
10	V _{ss}		

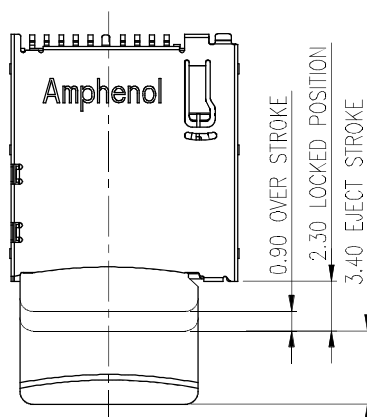

CARD DETECTION SWITCH	
WHEN CARD IS EJECTED	WHEN CARD IS INSERTED
OPEN 6(Vss) CD	CLOSE 6(Vss) CD

CONTACT FINISH	PACKING STYLE
1: 5 μ " GOLD	1: TAPE & REEL
2: 10 μ " GOLD	
3: 15 μ " GOLD	

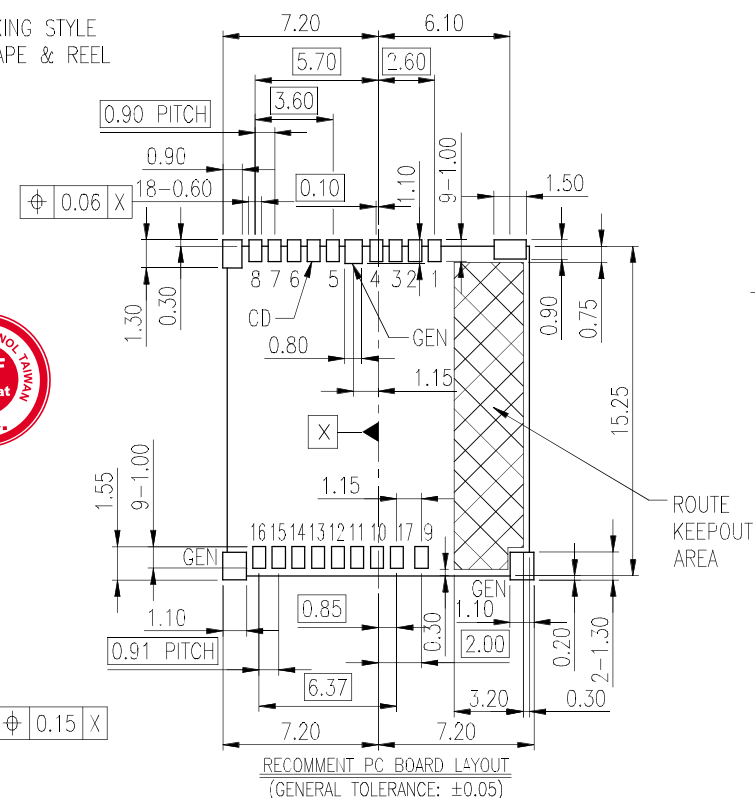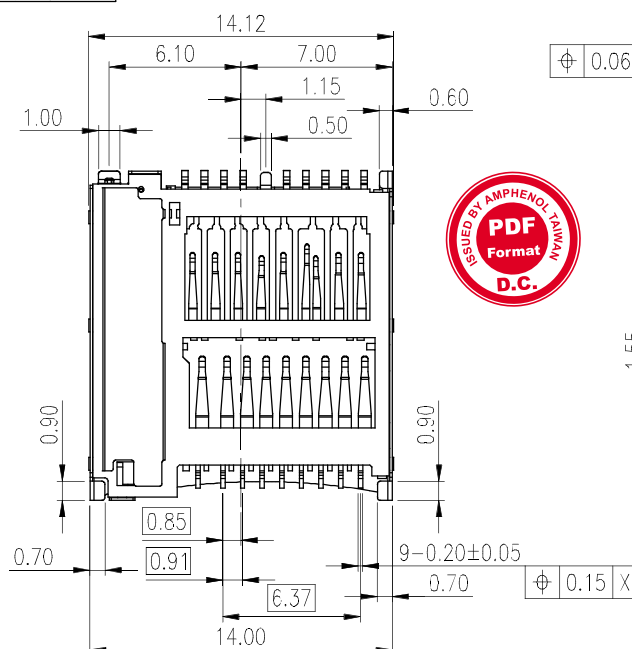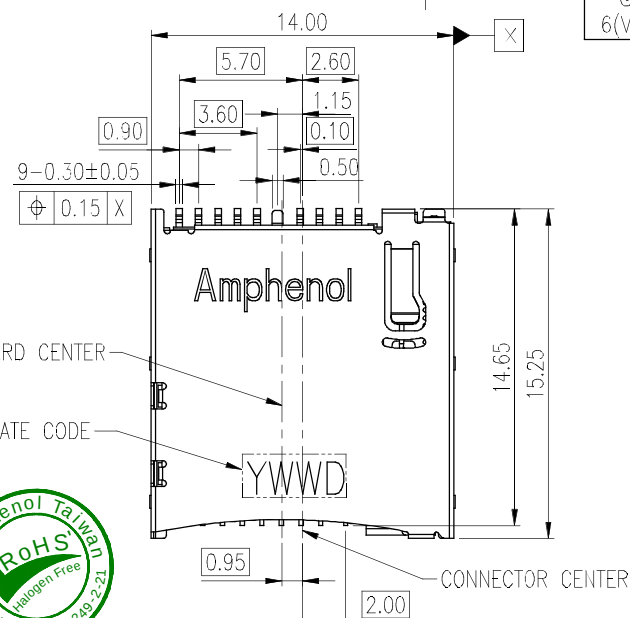

TOLERANCE		APPROVALS	DATE	TITLE GTF4P SERIES, MICRO SD 4.0 0.90 PITCH, HEIGHT 1.65mm NORMAL OPEN, PUSH PUSH TYPE			Amphenol® Amphenol Corporation Amphenol Taiwan Corporation					
X. X.X ±0.30 X.XX ±0.20 X.XXX ±0.10		DRAWN Karen Su	05/25/2017							PART No. GTF4P171XXHR		
		CHECKED Aqua Chou	05/25/2017									
		APPROVED Roger Tsai	05/25/2017									
ANGULAR ±1°				UNIT mm	SIZE A3							
UNLESS OTHERWISE SPECIFIED		DWG TYPE CUST DWG	PROJECT CODE OTHER	SCALE NA	SHEET 1 OF 2	DWG No. GTF4P171XXHR		REV. A				

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.





The marking on this product doesn't contain environmental hazardous materials per Material Specification 55-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant.





ORIGINAL



REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A	NE-17113	RELEASE TO PRODUCTION	05/25/2017	Roger Tsai

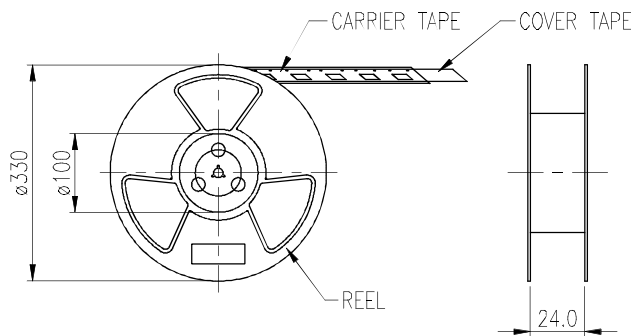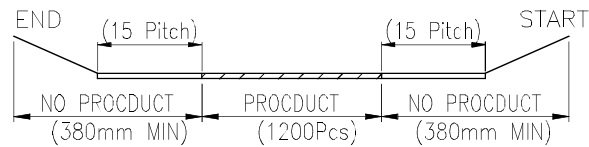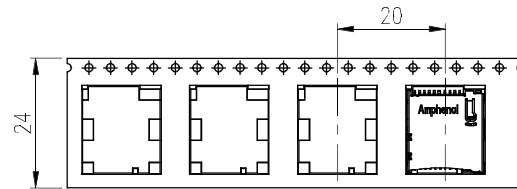

LABEL

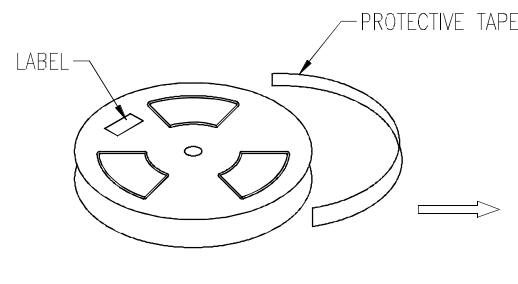



PARTITION BOARD

DRYER

PE BAG
W560*L800*0.06mm

OUTER CARTON
350*350*170mm

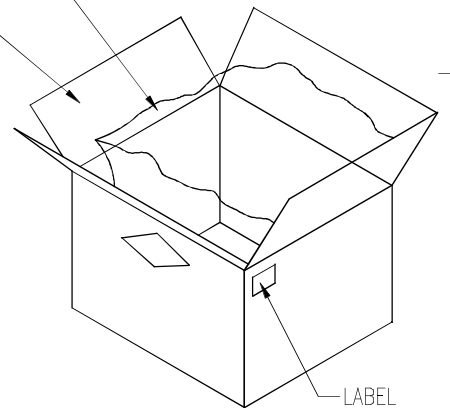

PACKAGING BY REEL		5.1	2.64	1,200	5	6,000	GTF4P171XXHR	
		G/W KG	N/W KG	PCS/ REEL	REELS/ BOX	QUANTITY (PCS)	PART NUMBER	
DATE		GTF4P SERIES, MICRO SD 4.0 0.90 PITCH, HEIGHT 1.65mm NORMAL OPEN, PUSH PUSH TYPE				Amphenol® Amphenol Corporation Amphenol Taiwan Corporation		
05/25/2017								
05/25/2017								
05/25/2017			UNIT mm	SIZE A3	PART No. GTF4P171XXHR			
PROJECT CODE OTHER			SCALE NA	SHEET 2 OF 2	DWG No. GTF4P171XXHR		REV. A	