




Relays & Contactors > Relays > Power Relays > PCB Power Relay: 30 Amp, Monostable DC

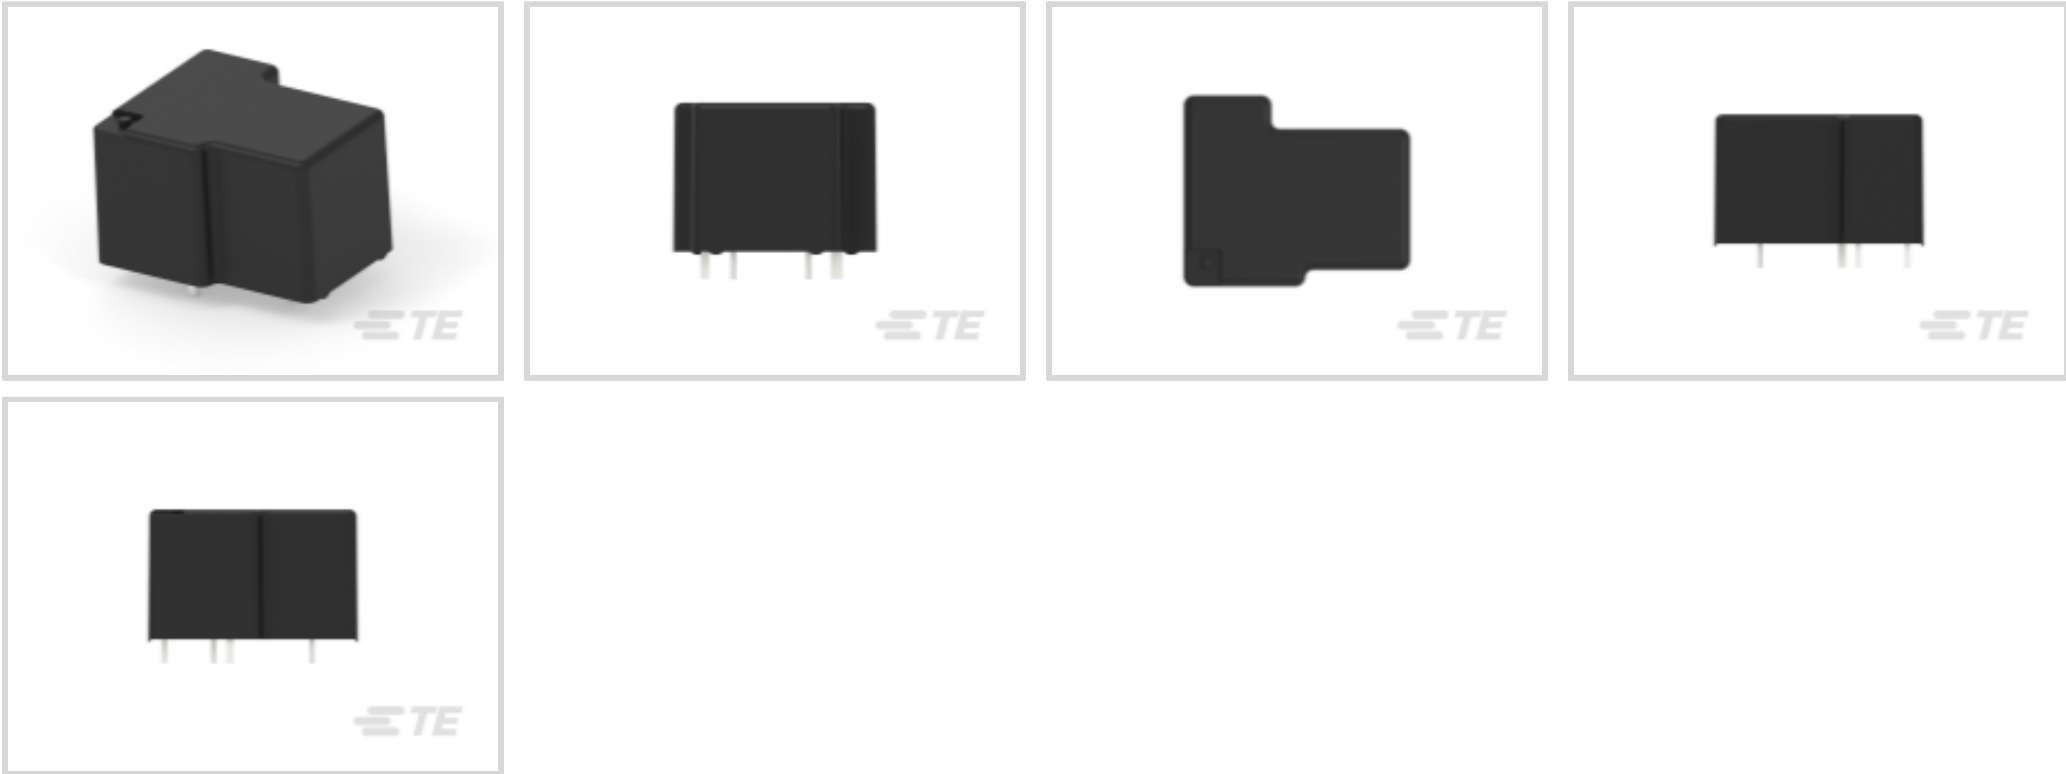

Relay Type: **Standard**
Coil Magnetic System: **Monostable**
Coil Power Rating DC: **1000 mW**
Coil Resistance: **81 Ω**
Coil Special Features: **UL Coil Insulation Class F**
[All PCB Power Relay: 30 Amp, Monostable DC \(67\)](#)

Features

Product Type Features

Relay Type	Standard
------------	----------

Configuration Features

Insulation Special Features	6000V Initial Surge Withstand Voltage between Contacts & Coil
Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	1 Form C (CO)
Contact Number of Poles	1

Electrical Characteristics

Output Current Rating	0 - 10 Arms, 0 - 20 Arms
Coil Current	.111 A
Insulation Initial Dielectric Between Open Contacts	1500 Vrms
Contact Limiting Short-Time Current	20 A
Coil Power Rating	1 W



Insulation Initial Dielectric Between Adjacent Contacts	1500 Vrms
Insulation Initial Resistance	1000 MΩ
Insulation Initial Dielectric Between Contacts & Coil	2500 Vrms
Output Voltage (Max)	240 V
Contact Limiting Making Current	20 A
Contact Limiting Continuous Current	20 A
Output Voltage Rating (AC Relays)	0 - 240 Vrms
Output Current (Min)	1 A
Contact Limiting Breaking Current	20 A
Coil Power Rating DC	1000 mW
Coil Resistance	81 Ω
Coil Voltage Rating	9 VDC
Contact Current Rating	20 A
Contact Switching Load (Min)	1000mA @ 5V
Contact Switching Voltage (Max)	277 VAC
Contact Voltage Rating	277 VAC

Body Features

Enclosure Type	Sealed
Primary Product Color	Black
Product Weight	26 g[.918 oz]

Contact Features

Contact Plating Material	AgCdO
Contact Material	AgCdO

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Insulation Clearance Between Contact & Coil	3.18 mm[.125 in]
Insulation Creepage Between Contact & Coil	6.36 mm[.25 in]
Product Width	27.43 mm[1.08 in]



Product Length	32.51 mm[1.28 in]
Product Height	20.4 mm[.803 in]

Usage Conditions

Environmental Ambient Temperature (Max)	85 °C[185 °F]
Operating Temperature Range	-55 - 85 °C[-67 - 185 °F]

Operation/Application

Actuating System	DC
Solder Process	Wave Solder
Output Switching	Random
Output Current Type	AC
Coil Magnetic System	Monostable

Packaging Features

Packaging Method	Box & Tray, Bundle
------------------	--------------------

Other

Length Class (Mechanical)	30 - 35 mm
Insulation Initial Dielectric Between Coil & Contact Class	1500 - 2500 V
Insulation Creepage Class	5.5 - 8 mm
Height Class (Mechanical)	25 - 30 mm
Coil Power Rating Class	800 - 1000 mW
Environmental Ambient Temperature Class	70 - 85 °C
Insulation Clearance Class	2.5 - 4 mm
Width Class (Mechanical)	25 - 30 mm
Contact Current Class	16 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold:



Cadmium oxide (10% in contact)

Article Safe Usage Statements:
Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 3-1393210-3
T9AS5D12-12

Also in the Series | Potter & Brumfield T9A

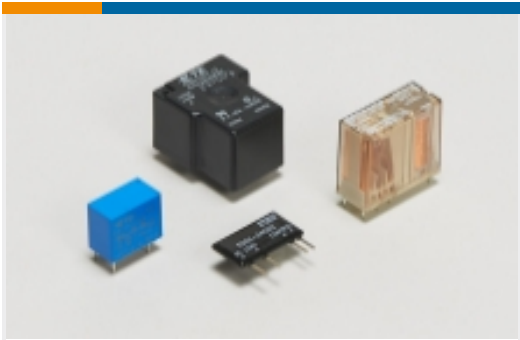

Power Relays(67)

Customers Also Bought



 TE Part # 3-1393210-3 T9AS5D12-12	 TE Part # 1558676-7 PCB Power Relay: 30 amp, Monostable DC	 TE Part # 8-1415029-1 PB114012	 TE Part # 1-2176349-1 CRGCQ 2512 68R 1%
 TE Part # 1-1721150-3 ORWH-SH-112D1F,000	 TE Part # 5-1419144-3 OJE-SS-109LMH,000	 TE Part # 927779-3 JPT REC 2.8 Contact SRC Sn (LP)	 TE Part # 2-1419108-0 RT444024F

Documents

- CAD Files

Customer View Model

[ENG_CVM_CVM_4-1393210-0_K1.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-1393210-0_K1.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-1393210-0_K1.3d_igs.zip](#)

English

3D PDF

3D
- By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

- T9A Relay Datasheet

English

Product Specifications

- Definitions General Purpose Relays

English

Agency Approvals

- Agency Approval Document

English