

**1410326-3**  ACTIVE**MULTIGIG RT | MULTIGIG RT 2**

TE Internal #: 1410326-3

High Speed Backplane Connectors, 112 Position, Mating  
Alignment, Guide Slot Mating Alignment Type, 7 Row, 16 Column,  
PCB Mount Header, MULTIGIG RT 2

[View on TE.com >](#)[Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors](#)Number of Positions: **112**Row-to-Row Spacing: **1.35 mm [.053 in]**Mating Alignment: **With**Mating Alignment Type: **Guide Slot**Number of Rows: **7**

## Features

### Product Type Features

Backplane Module Type	Center
Applied to Printed Circuit Board Type	Daughtercard
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Shroud Style	Fully Shrouded

### Configuration Features

Number of Ground Positions	31
Card Slot Centerline	20.3 mm[.8 in]
Number of Pairs	20
Backplane Architecture	Traditional Backplane
Number of Positions	112
Number of Rows	7
Number of Columns	16
PCB Mount Orientation	Right Angle
Guide Location	Right

### Electrical Characteristics

Impedance	100 Ω
-----------	-------

Operating Voltage	50 VAC
-------------------	--------

### Signal Characteristics

Differential Impedance	100 Ω
------------------------	-------

Number of Differential Pairs per Column	2
---	---

Data Rate	≤12 Gb/s
-----------	----------

### Body Features

Primary Product Color	Black
-----------------------	-------

### Contact Features

Contact Mating Area Length	2.9 mm[.8 in]
----------------------------	---------------

PCB Contact Termination Area Plating Material Thickness	1.27 μm[50 μin]
---	-----------------

Contact Layout	Inline
----------------	--------

Contact Type	Pin
--------------	-----

Contact Underplating Material Thickness	1.27 μm[50 μin]
---	-----------------

Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
--	-----------------

Contact Mating Area Plating Material	Gold
--------------------------------------	------

PCB Contact Termination Area Plating Material Finish	Bright
--	--------

Contact Underplating Material	Nickel
-------------------------------	--------

PCB Contact Termination Area Plating Material	Tin-Lead
---	----------

Contact Base Material	Copper
-----------------------	--------

Contact Current Rating (Max)	1 A
------------------------------	-----

### Termination Features

Termination Post & Tail Length	1.4 mm[.055 in]
--------------------------------	-----------------

Termination Method to Printed Circuit Board	Through Hole - Press-Fit
---	--------------------------

### Mechanical Attachment

Guide Hardware	With
----------------	------

Mating Retention	With
------------------	------

PCB Mount Alignment	With
---------------------	------

PCB Mount Retention	With
---------------------	------

PCB Mount Retention Type	Action/Compliant Tail
--------------------------	-----------------------

Mating Alignment	With
------------------	------

Mating Alignment Type	Guide Slot
-----------------------	------------

## Connector Mounting Type

Board Mount

**Housing Features**

Number of Shrouded Sides	2
Housing Material	LCP (Liquid Crystal Polymer)
Centerline (Pitch)	1.8 mm[.07 in]

**Dimensions**

Connector Length	28.68 mm[1.129 in]
Connector Height	18.4 mm[.724 in]
PCB Thickness (Recommended)	1.6 - 4 mm[.062 - .157 in]
PCB Hole Diameter	.46 mm[.018 in]
Row-to-Row Spacing	1.35 mm[.053 in]

**Usage Conditions**

Operating Temperature Range	-55 - 105 °C[-67 - 221 °F]
-----------------------------	----------------------------

**Operation/Application**

Durability Rating	500 Cycles
Circuit Application	Power & Signal

**Packaging Features**

Packaging Method	Tube
------------------	------

**Product Compliance**For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Pb (7% in contact plating) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

## Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts



TE Part # 2000676-1  
Keyed Guide Pin, Machined, Vita 46



TE Part # 2000713-1  
RA Keyed Guide Mod, Vita 46, Machined

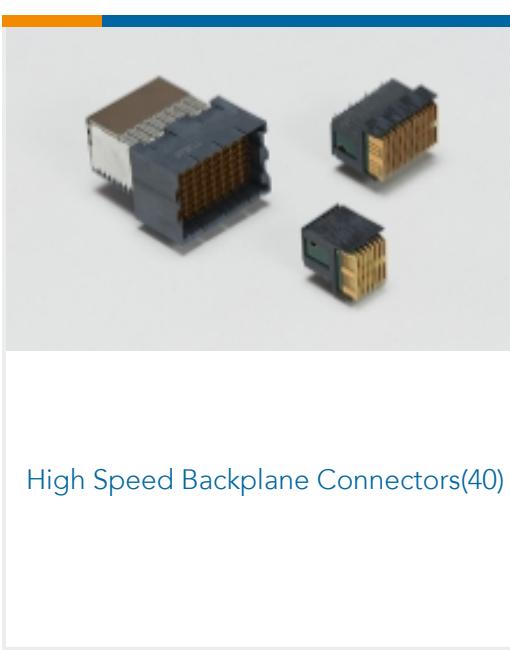Also in the Series | **MULTIGIG RT 2**

High Speed Backplane Connectors(40)

## Customers Also Bought



TE Part # 2309407-2  
DDR4 SODIMM 260P 4.0H STD




TE Part # 1-1469492-1  
MULTIGIG RT 9MM GUIDE/ESD 0 DEG



TE Part # 2000676-2  
Keyed Guide Pin, Machined, Vita 46



TE Part # 1-1469492-8  
MULTIGIG RT 9MM GUIDE/ESD 315 DEG

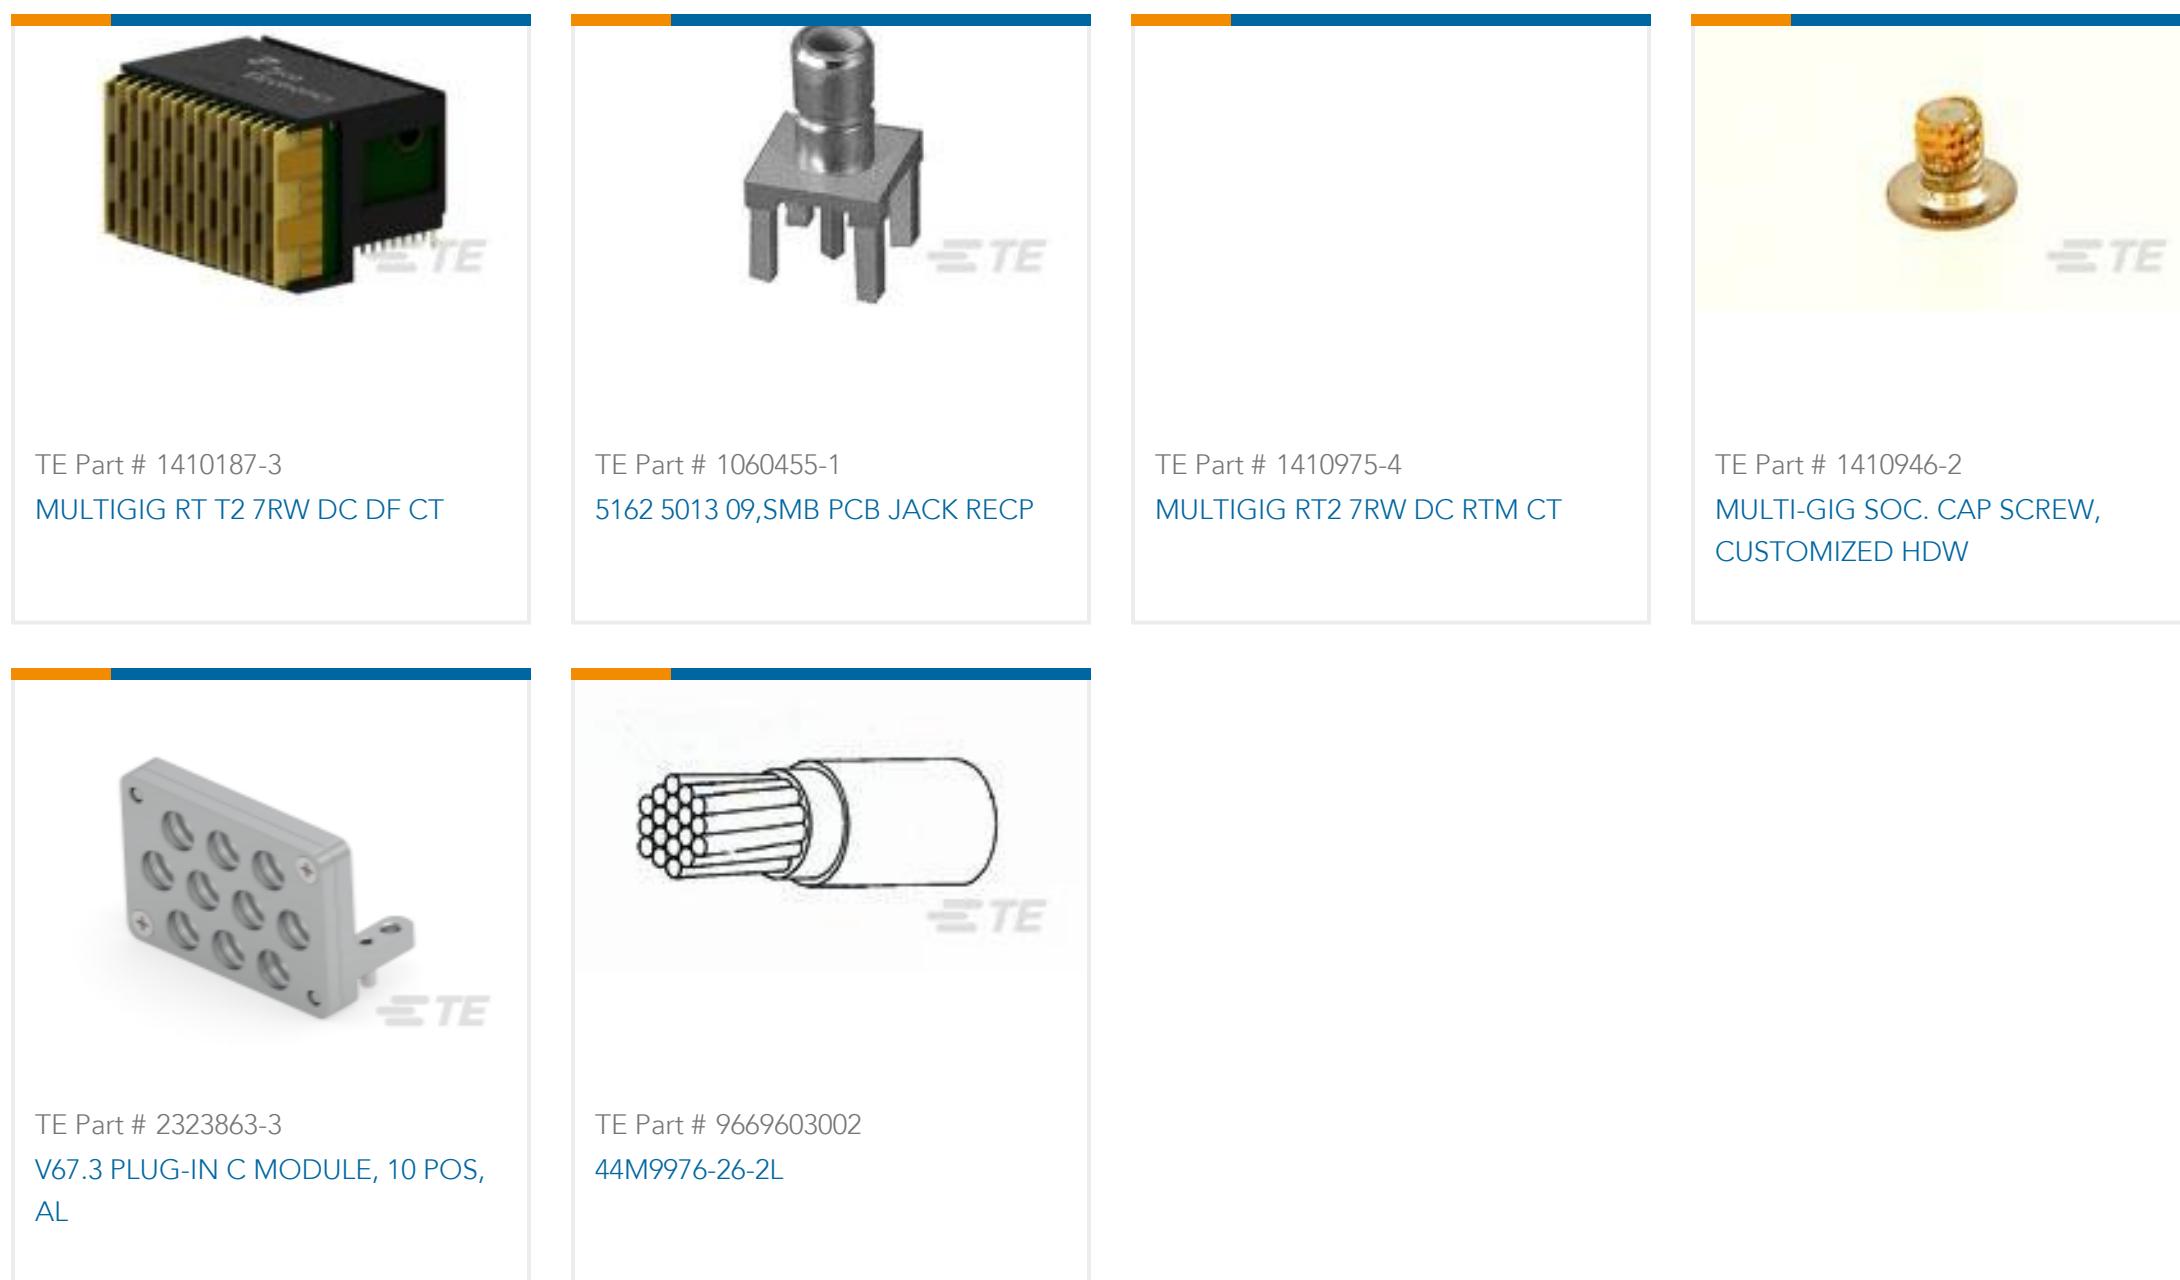

## Documents

### Product Drawings

#### MULTIGIG RT T2 7RW DC DF CT

English

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1410326-3\\_B.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1410326-3\\_B.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1410326-3\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

#### SOSA Aligned Interconnect Solutions

English