

9-146258-0  ACTIVE

AMPMODU | AMPMODU Headers

TE Internal #: 9-146258-0

PCB Mount Header, Vertical, Board-to-Board, 80 Position, 2.54 mm


[.1 in] Centerline, Breakaway, Tin, Through Hole - Solder, Signal,

AMPMODU Headers

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles

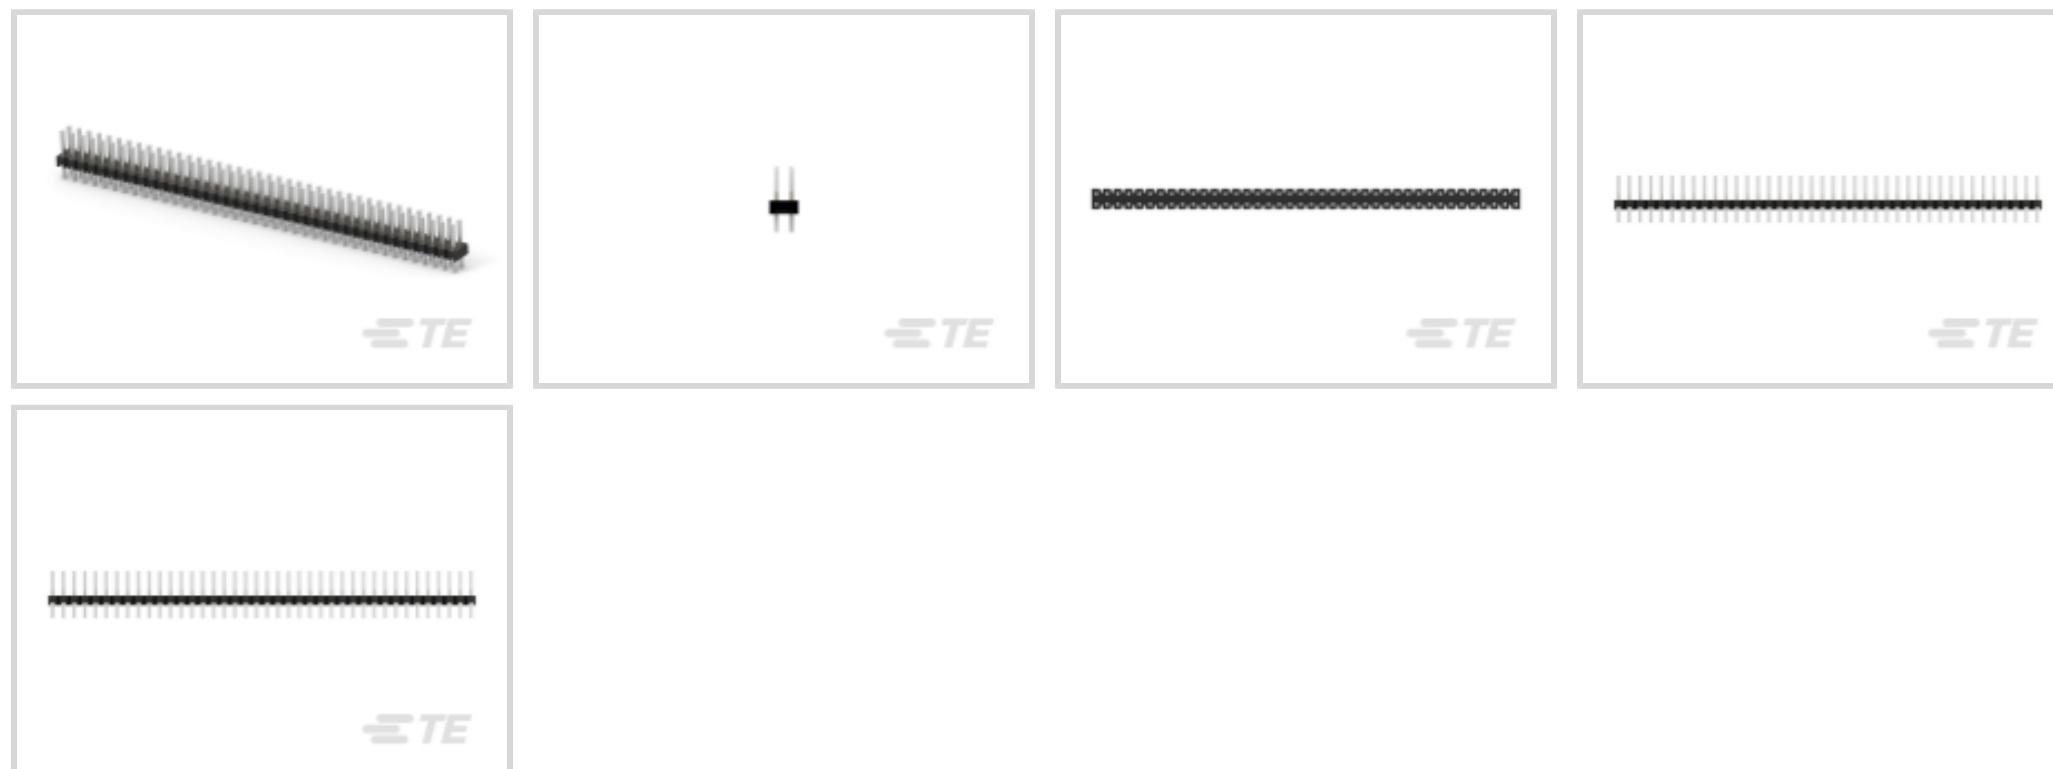

PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **80**

Number of Rows: **2**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Breakaway
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	80
Number of Rows	2
Board-to-Board Configuration	Parallel

Electrical Characteristics

Operating Voltage	30 VAC
-------------------	--------

Body Features

Connector Profile

Standard

Primary Product Color

Black

Contact Features

Mating Square Post Dimension

.64 mm[.025 in]

100 - 200 μ in

PCB Contact Termination Area Plating Material Finish

Matte

Contact Shape & Form

Square

Contact Underplating Material

Nickel

PCB Contact Termination Area Plating Material

Tin

Contact Base Material

Phosphor Bronze

Contact Mating Area Plating Material

Tin

Contact Mating Area Plating Material Thickness

2.54 - 5.08 μ m[100 - 200 μ in]

Contact Type

Pin

Contact Current Rating (Max)

3 A

Termination Features

Square Termination Post & Tail Dimension

.64 mm[.025 in]

Termination Post & Tail Length

2.29 mm[.09 in]

Termination Method to Printed Circuit Board

Through Hole - Solder

Mechanical Attachment

Mating Alignment

Without

PCB Mount Retention

Without

PCB Mount Alignment

Without

Connector Mounting Type

Board Mount

Housing Features

Centerline (Pitch)

2.54 mm[.1 in]

Housing Material

Thermoplastic

Dimensions

Row-to-Row Spacing

2.54 mm[.1 in]

PCB Thickness (Recommended)

1.57 mm[.062 in]

Usage Conditions

Housing Temperature Rating

High

Operating Temperature Range

-65 - 105 °C[-85 - 221 °F]

Operation/Application

Solder Process Feature	Board Standoff
Circuit Application	Signal

Industry Standards

Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	50
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Pin-in-Paste capable to 260°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


TE Part # 2-5102084-6
80 MODII HORZ DR CE EESS .100TE Part # 9-146762-0
80 MODII RCPT VERT DR

Also in the Series


AMPMODU Headers

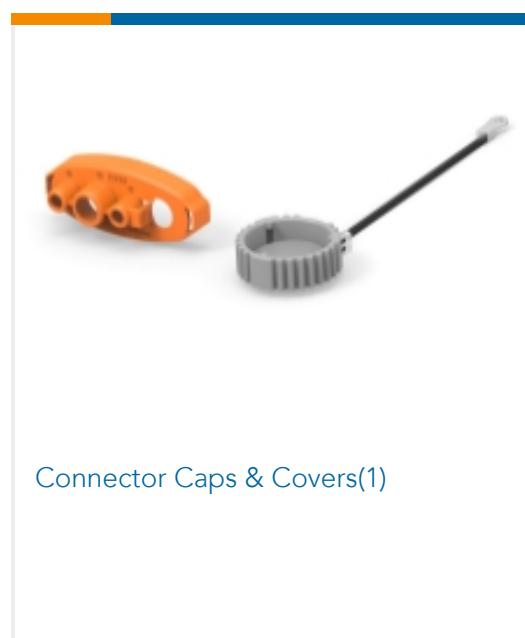

Connector Caps & Covers(1)

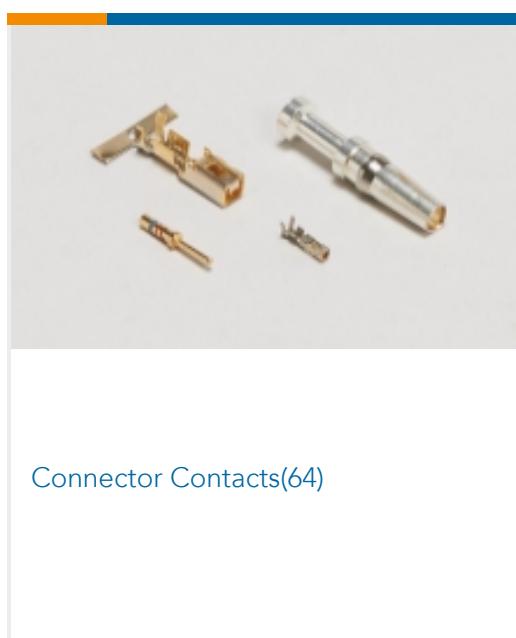


Connector Contacts(64)

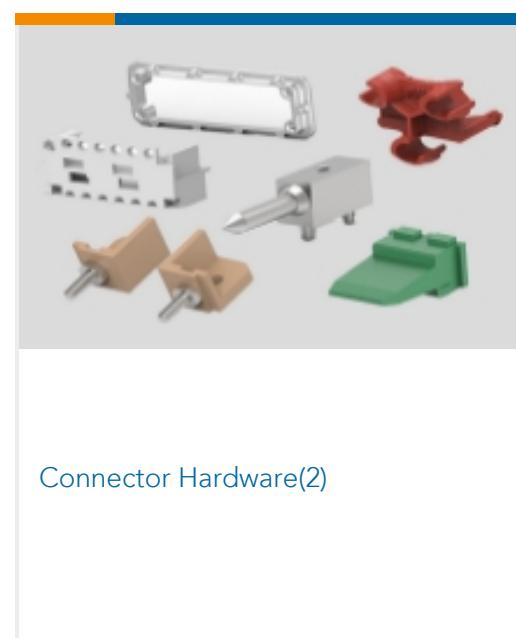

Connector Hardware(2)



PCB Headers & Receptacles(4349)

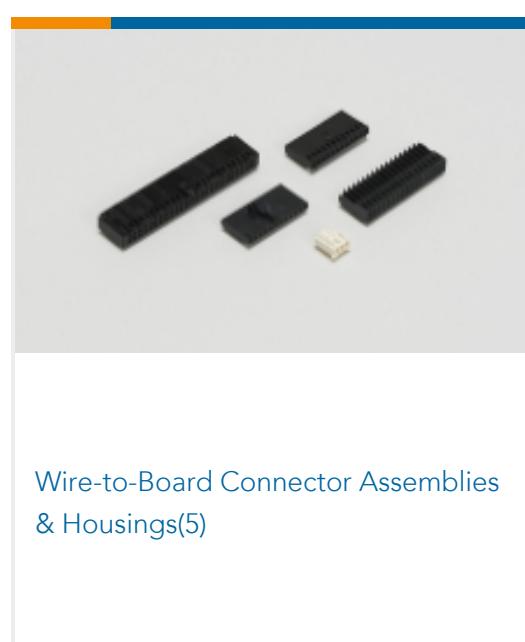

Wire-to-Board Connector Assemblies & Housings(5)

Customers Also Bought

TE Part # 3-1462039-8
Standard Signal Relay 2 Form C,2 CO
ContTE Part # 2-644861-4
04P MTA100 SHRD HDR,W/O PEG SNTE Part # 5520258-3
M/JTOP6P/6CPNL STOPSTRAY PTE Part # 640445-7
07P MTA156 HDR ASSY FL/STR SNTE Part # 640445-5
05P MTA156 HDR ASSY FL/STR SNTE Part # 1217056-1
250 FASTON,PCB TAB,TPBRTE Part # 9-146280-0
40 MODII HDR SRST B/A .100CLTE Part # 3-1437624-2
PKD70B101/4=KNOB PLASTIC W/SKI



TE Part # 2081393-3
CA,MATE AX F TO FAKRA F,RTK031,
1000MM

Documents

Product Drawings

[80 MODII HDR DRST B/A .100CL](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_9-146258-0_F.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_9-146258-0_F.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_9-146258-0_F.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[AMPMODU_INTERCONNECTION_SYSTEM_SECTION5](#)

English