




MQS

TE Internal #: 966658-1

PCB Mount Header, Vertical, Wire-to-Board, 32 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, Green, MQS

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles > Signal Header

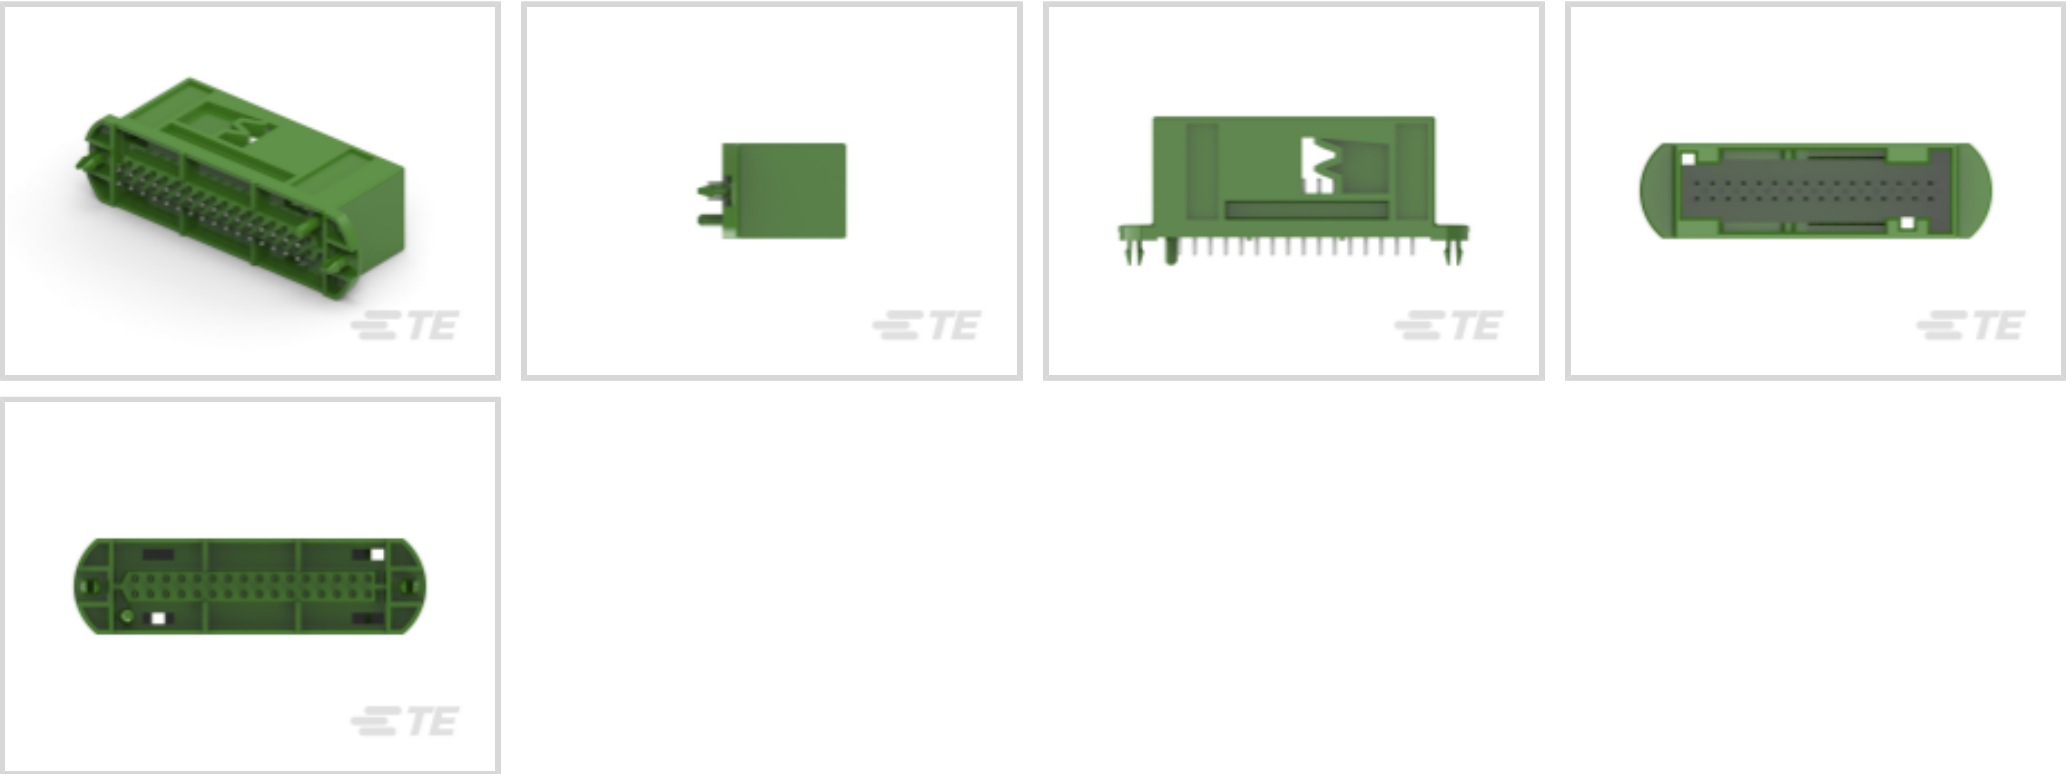

Connector System: **Wire-to-Board**

Number of Positions: **32**

Centerline (Pitch): **2.54 mm [.1 in]**

Sealable: **No**

PCB Mount Orientation: **Vertical**

[All Signal Header \(319\)](#)

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Header Type	Fully Shrouded
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Sections	1
Number of Signal Positions	32
Number of Positions	32
PCB Mount Orientation	Vertical
Number of Rows	2



Electrical Characteristics

Nominal Voltage Architecture	12 V
------------------------------	------

Body Features

Primary Product Color	Green
Connector & Keying Code	A-F

Contact Features

Contact Size	.63mm
Contact Type	Tab
Mating Tab Width	.63 mm[.024 in]
Mating Tab Thickness	.63 mm[.024 in]
Contact Mating Area Plating Material	Tin

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

Mechanical Attachment

Mating Retention	With
Mating Alignment	With
PCB Mount Retention	With
PCB Mount Retention Type	Boardlock
Mating Retention Type	Locking Interface

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
--------------------	----------------

Dimensions

Connector Length	57.6 mm[2.26 in]
Connector Width	15.6 mm[.614 in]
Profile Height from PCB	20.2 mm[.795 in]

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C[149 °F][158 °F][167 °F][176 °F][185 °F][194 °F][212 °F]
Operating Temperature Range	-30 - 100 °C[-22 - 212 °F]

Operation/Application

Shielded	No
----------	----



Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94HB

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <div>TE Part # 281934-4 SINGLE WIRE SEAL</div>	 <div>TE Part # CAT-M8793-CH8172 MQS, CONNECTOR HOUSING</div>	 <div>TE Part # 1989718-1 COVER ASSY MQS HSG 2X16 POSN.</div>	 <div>TE Part # 966661-3 TSP/MOD STVERB2X16P</div>
--	--	--	---


Also in the Series | MQS




Automotive Connector Caps & Covers (113)




Automotive Connector EMC Shielding (3)

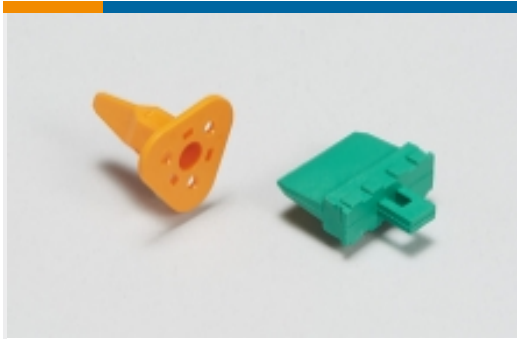

Automotive Connector Locks & Position Assurance(26)

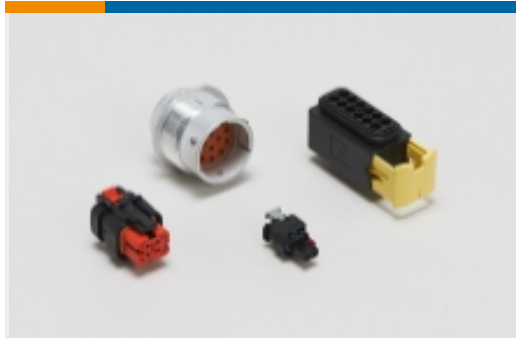

Automotive Housings(379)

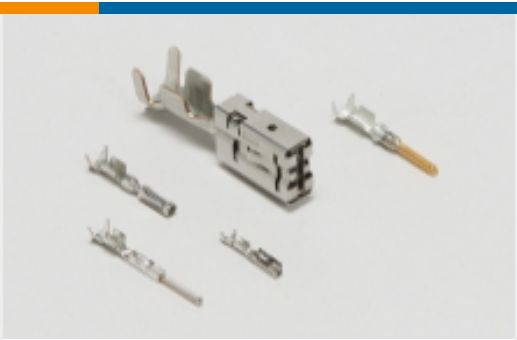

Automotive Terminals(88)




Connector Seals & Cavity Plugs(26)



Insertion & Extraction Tools(42)



Other Automotive Connector Accessories(7)

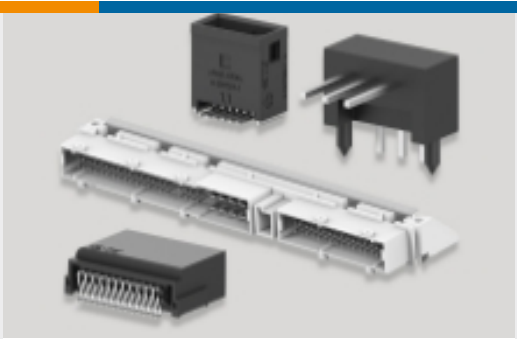


PCB Headers & Receptacles(143)

Customers Also Bought



TE Part # 967598-1
Signal Header

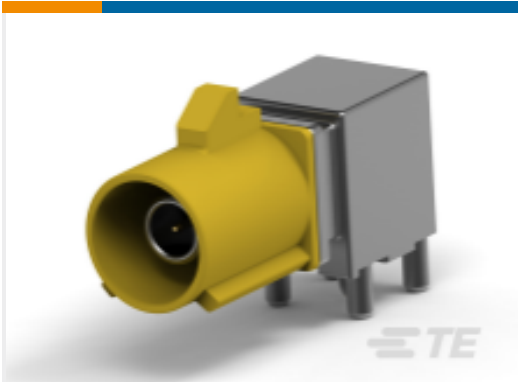

TE Part # 1-2291392-0
MALE ASM, 1 POS, R/A, PCB, FAKRA



TE Part # 2291362-5
4POS,PIN DIA 0.6,HEADER ASSY, CODE E



TE Part # 1-2311788-1
12POS,HYBRID,HDR ASSY,90DEG, SLDR



TE Part # 1802826-1
8POS,TAB0.63X0.63,HDR ASSY, 180DEG,COD 1



TE Part # 2291362-3
4POS,PIN DIA 0.6,HEADER ASSY, CODE C



TE Part # 1SNA115177R1400
M4/6.DE1



TE Part # 1-1924678-1
26P SMT LAC HDR ASY, KEY AE, Hand Mate

Documents



Product Drawings

32pos MQS .63 header 180deg

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_966658-1_G1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_966658-1_G1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_966658-1_G1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English