




## MT12/12-ASJL-APC

Ruland Adjustable Two-Way Spring Joint, Clamp 12mm, Height 92mm, Lever Length 63mm, Powder Coated Aluminum

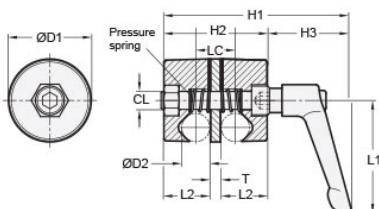

### Description

Ruland MT12/12-ASJL-APC is an adjustable two-way spring joint with a 12mm clamping diameter, M8 clamp screw, 36mm base diameter, 63mm lever length, and 47mm overall length. It is designed to mate Ruland MT12 or the user's own round tubes and rods via a V-groove, allowing a greater tolerance to be bridged. MT12/12-ASJL-APC is aluminum with a powder coating, the lever is zinc die-cast with a plastic coating, and the inserts are stainless steel for added corrosion resistance. It is used in mounting systems for sensors, screens, reflectors, plexiglass machine guards, and other industrial components. The spring is made tighter or looser by adjusting the clamping lever allowing the user to rapidly adjust tubes as needed. MT12/12-ASJL-APC is manufactured by Otto Ganter, inventoried by Ruland, and RoHS3 compliant..

### Product Specifications

<b>Clamping Diameter D2</b>	12 mm	<b>Base Diameter D1</b>	36 mm
<b>Lever Length L1</b>	63 mm	<b>Lever Height H3</b>	45 mm
<b>Body Height H2</b>	47 mm	<b>Overall Height H1</b>	92 mm
<b>Surface To Edge L2</b>	21 mm	<b>Center To Center LC</b>	17 mm
<b>Spacer Thickness T</b>	5 mm	<b>Clamp Screw CL</b>	M8
<b>Weight (lbs)</b>	0.429000	<b>Material Specification</b>	Powder Coated Aluminum
<b>Manufacturer</b>	JW Winco/ Otto Ganter	<b>UPC</b>	634529229996
<b>Country of Origin</b>	Taiwan	<b>Tariff Code</b>	7609.00.0000
<b>UNSPC</b>	31162908		

### Note 1

Performance ratings are for guidance only. The user must determine suitability for a particular application.

### Prop 65

 **WARNING** This product can expose you to chemicals including Soots, Benzene, Lead, and Nickel (metallic), known to the State of California to cause cancer, and Lead and Benzene known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).