




MTA 100

TE Internal #: 3-647001-8

Standard Rectangular Connectors, Connector Assembly, Plug, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100

[View on TE.com >](#)

Connectors > Rectangular Connectors > Standard Rectangular Connectors > MTA Plug: Nylon, Tin Plated, 2.54 mm, with Mating Alignment

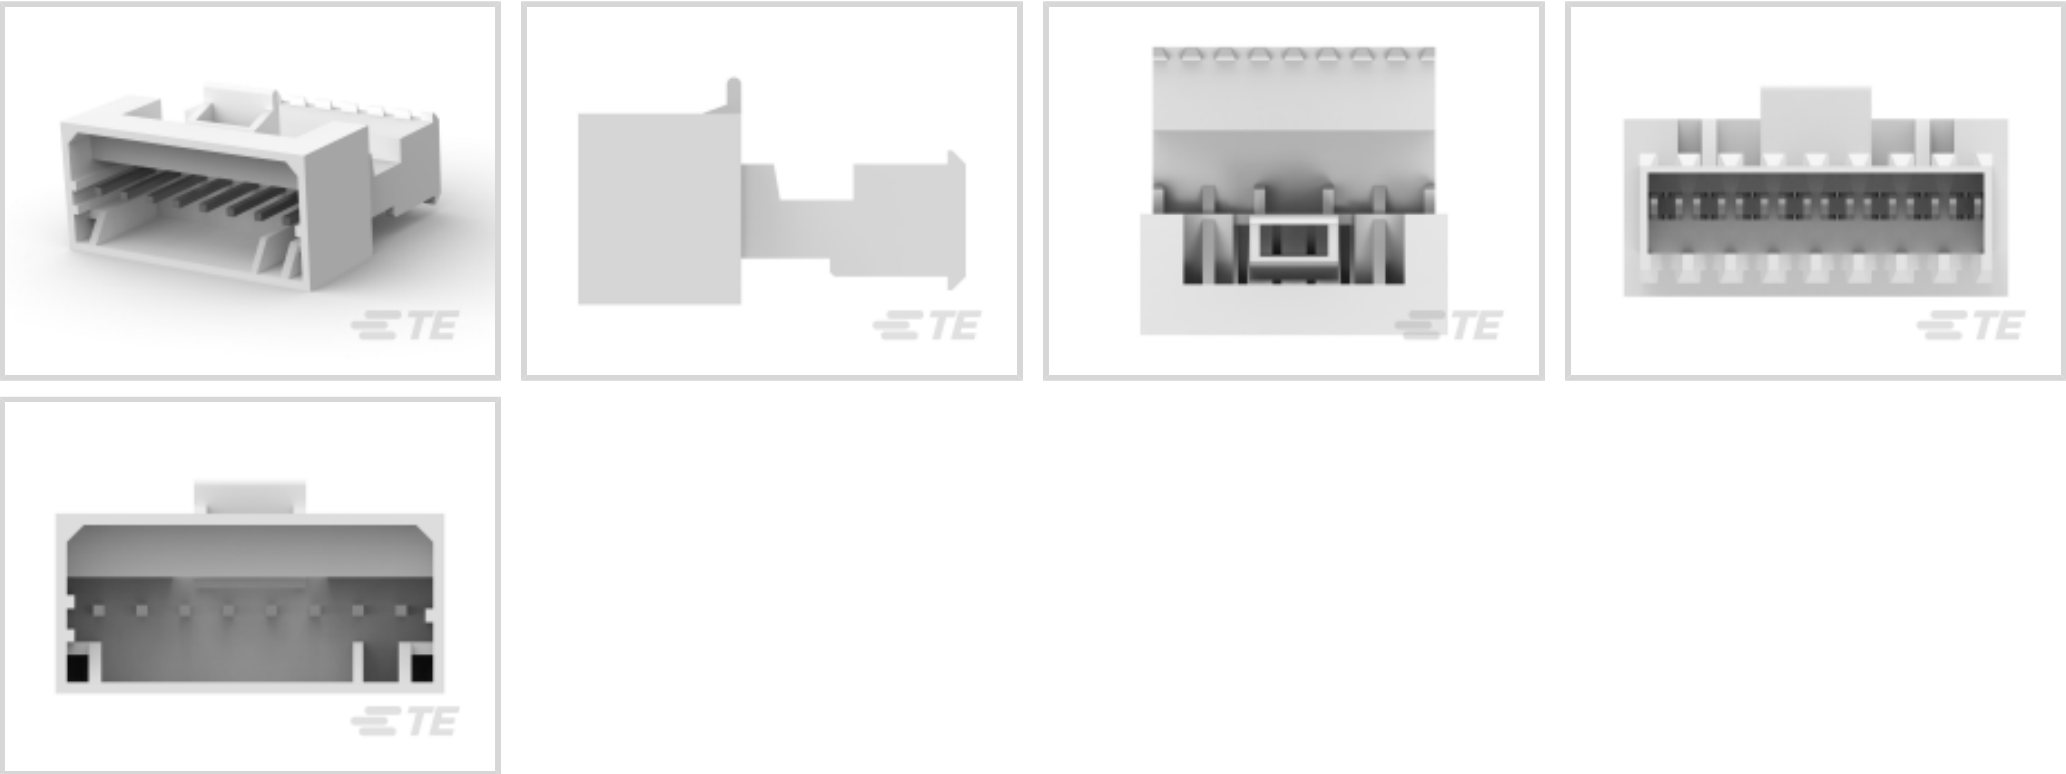

Connector Product Type: **Connector Assembly**

Connector & Housing Type: **Plug**

Mating Alignment: **With**

Mating Alignment Type: **Polarization**

Mating Retention: **With**

[All MTA Plug: Nylon, Tin Plated, 2.54 mm, with Mating Alignment \(28\)](#)

Features

Product Type Features

| | |
|------------------------------------|--------------------|
| Compatible With Discrete Wire Type | Stranded |
| Connector Product Type | Connector Assembly |
| Connector & Housing Type | Plug |
| Connector System | Wire-to-Wire |
| Insertion Force Type | Normal |
| Sealable | No |
| Connector & Contact Terminates To | Wire & Cable |

Configuration Features

| | |
|---------------------|-----|
| Number of Cavities | 8 |
| Contacts Preloaded | Yes |
| Number of Positions | 8 |
| Number of Rows | 1 |



Electrical Characteristics

| | |
|-------------------|---------|
| Operating Voltage | 250 VAC |
|-------------------|---------|

Contact Features

| | |
|--|--------|
| Contact Type | Tab |
| Wire Contact Termination Area Plating Material | Tin |
| Contact Underplating Material | Nickel |
| Contact Mating Area Plating Material | Tin |
| Contact Retention Within Housing | With |
| Contact Current Rating (Max) | 5 A |

Termination Features

| | |
|------------------------------------|-------------------------------|
| Termination Method to Wire & Cable | Insulation Displacement (IDC) |
|------------------------------------|-------------------------------|

Mechanical Attachment

| | |
|---------------------------------------|----------------------------|
| Contact Retention Type Within Housing | Locking Lance |
| Mating Alignment | With |
| Mating Alignment Type | Polarization |
| Mating Retention | With |
| Mating Retention Type | Latch |
| Connector Mounting Type | Cable Mount (Free-Hanging) |

Housing Features

| | |
|--------------------|----------------|
| Housing Material | Nylon 6/6 |
| Housing Color | White |
| Centerline (Pitch) | 2.54 mm[.1 in] |

Dimensions

| | |
|------------------|-------------------|
| Connector Height | 12.54 mm[.494 in] |
| Product Width | 21.4 mm[.843 in] |
| Product Length | 22.86 mm[.9 in] |
| Wire Size | .2 mm² |

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 - 105 °C[-67 - 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|---------------------|--------|
| Shielded | No |
| Circuit Application | Signal |



Industry Standards

| | |
|---|------------|
| CSA Rating | LR 7189 |
| UL Rating | Recognized |
| Compatible With Agency/Standards Products | CSA, UL |
| Compatible With Approved Standards Products | UL E28476 |
| UL Flammability Rating | UL 94V-2 |

Packaging Features

| | |
|--------------------|---------|
| Packaging Quantity | 100 |
| Packaging Method | Bag/Box |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-104MTA-NTPMR
Nylon Tin Plated Receptacle: 2.54 mm, with Mating Alignment, MTA 100

TE Part # CAT-104MTA-PLSCC
Polyester PCB Connector Covers: 2.54 mm, MTA 100

TE Part # CAT-104MTA-NTPNR
MTA Receptacle: Nylon, Tin Plated, 2.54 mm

TE Part # CAT-104MTA-NYLCC
Nylon PCB Connector Covers: 2.54 mm, MTA 100

TE Part # 58074-1
MTA 50/100/156 MANUAL TOOL FRAME

TE Part # 58638-1
MTA 100 CRIMP HEAD PRODUCTION POSTED

Also in the Series | MTA 100

Connector Caps & Covers(69)

Connector Contacts(8)

Connector Hardware(1)

Insertion & Extraction Tools(2)

PCB Headers & Receptacles(440)

Standard Rectangular Connectors(495)

Wire-to-Board Connector Assemblies & Housings(1)

Customers Also Bought

TE Part # MS583702BA01-50
MS5837-02BA01 2BA T&R PRESSURE SEN

TE Part # 4-6609951-3
PS0SXD SX0=C4457

TE Part # 4-1879378-1
TLR 2512 2.0W R0025 1% 150PPM 2K RL

TE Part # 1445904-1
NUT, JAM, 3/4-20, PKG QTY 100 RL



TE Part # 1658621-2
14 NOVO MIL/CTR 15DP, LEAD FREE

TE Part # 1838891-2
M12 MtI FEMALE PNL CONN. Sldr Rear (Hex)

TE Part # 5555154-4
MJ, R/A, LP, F6P/6C, SHLD, PNLTUBE

TE Part # 1879417-5
CPF0603 750K 0.1% 25PPM 5K RL

TE Part # 1-2176331-5
CRGP 2512 150R 1%

Documents

Product Drawings

08P MTA100 PSTD CONN ASSY SN

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_3-647001-8_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_3-647001-8_E.3d_igs.zip

English

Customer View Model

ENG_CVM_3-647001-8_E.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-647001-8_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-647001-8_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-647001-8_C.3d_stp.zip

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

Agency Approval Document

English