

Terminals & Splices > Ring Terminals

Ring Terminal Product Type: **Closed Ring Tongue Terminal**Wire Size: **.5 - 1 mm²**Stud Size: **3/8**Stud Diameter: **10.5 mm [.415 in]**

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	3/8
Sealable	No
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support

Configuration Features

Number of Holes	1
-----------------	---

Body Features

Insulation Sleeve Color	Red
Product Weight	1 g [.03527 oz]

Contact Features

Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Wire Size	.5 - 1 mm ²
-----------	------------------------

Stud Diameter	10.5 mm [.415 in]
Tongue Thickness	.79 mm [.031 in]
Product Length	42.98 mm [1.692 in]
Barrel Inside Diameter	4.06 mm [.16 in]

Usage Conditions

Insulation Option	Partially Insulated
Operating Temperature Range	-55 - 125 °C [-67 - 257 °F]

Operation/Application

Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin, Unplated

Industry Standards

Government Qualified Terminal	No
-------------------------------	----

Packaging Features

Packaging Quantity	1000
Packaging Method	Package

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part


numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # EG8162-000
HL1920E-230V-EURO

Customers Also Bought

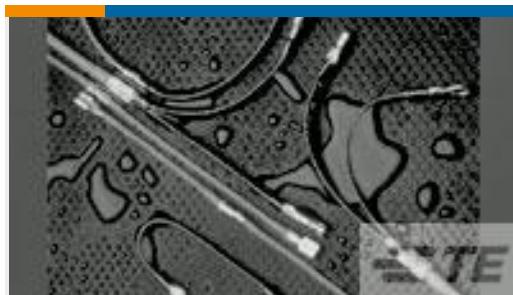

TE Part # 138601-000
B-106-1401



TE Part # 224793-000
B-106-1601



TE Part # 61375-1
250 FASTON REC 18-14 AWG TPBR



TE Part # 7-1676123-5
1/2W SM M/OX 5% 1KO




TE Part # 320573
PIDG R 22-16COMM 22-18MIL 3/8




TE Part # NB07752001
HTAT-24/6-0-STK



TE Part # 650082-000
D-436-58

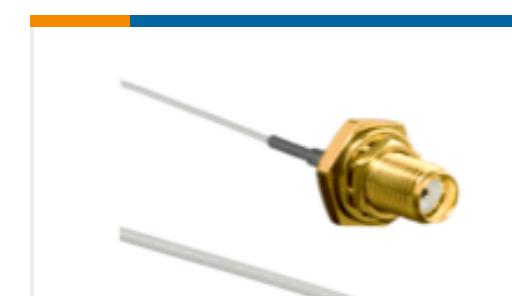

TE Part # CSI-SGFI-200-UFFR
SMA to U.FL/MHF1 200mm 1.13 OD

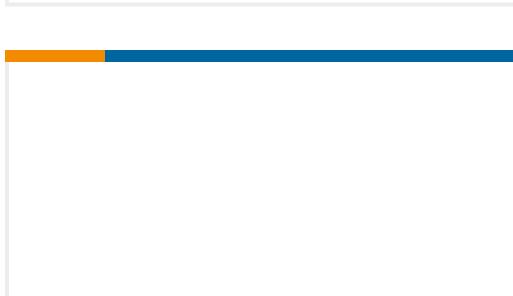

TE Part # 4376986001
DR-25-1/8-0-FAR-10M

Documents

Product Drawings

B-106-1991

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_336841-000_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_336841-000_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_336841-000_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654025_Sec8_B-106](#)

English

Product Specifications

[Installation Procedure for Duraseal Splices and Terminals](#)

English