

1-2355181-0 ✓ ACTIVE

AMPMODU | AMPMODU 2 mm


TE Internal #: 1-2355181-0

PCB Mount Header, Vertical, Board-to-Board, 10 Position, 2 mm [.079 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, AMPMODU 2 mm

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles

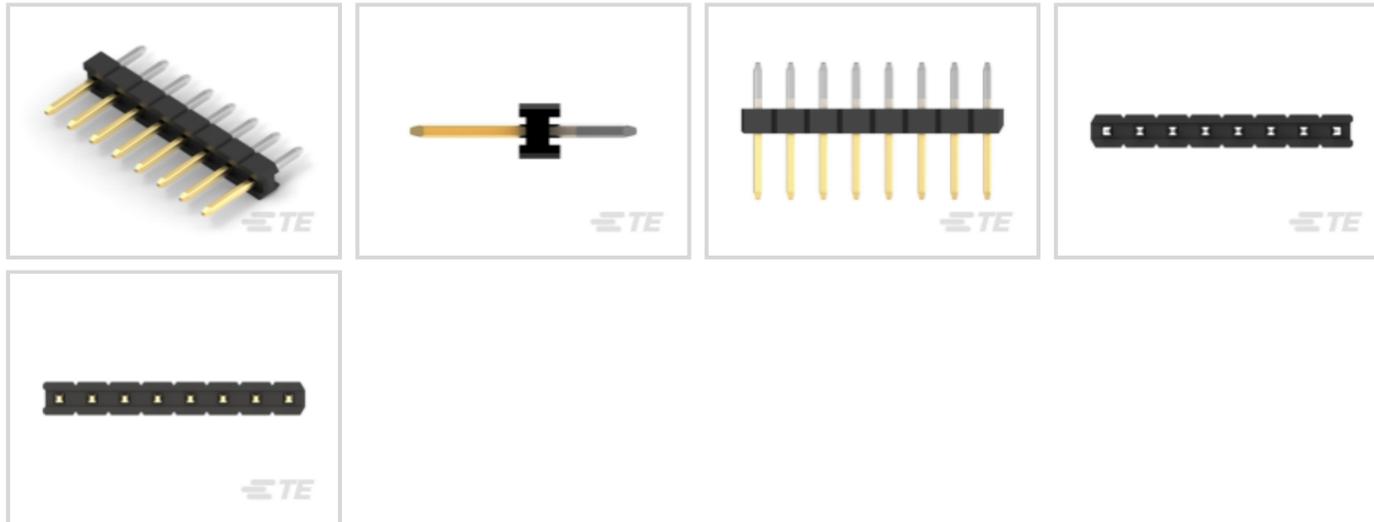

PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **10**

Number of Rows: **1**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Breakaway
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Stackable	No
PCB Mount Orientation	Vertical
Number of Positions	10
Number of Rows	1

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	500 VAC
Operating Voltage	125 VAC

Body Features

Connector Profile	Standard
-------------------	----------



Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Mating Area Length	4 mm[.157 in]
----------------------------	---------------

Mating Square Post Dimension	.5 mm[.02 in]
------------------------------	---------------

PCB Contact Termination Area Plating Material Thickness	2 μ m[78.74 μ in]
---	---------------------------

Contact Layout	Inline
----------------	--------

Contact Underplating Material Thickness	.5 μ m[19.69 μ in]
---	----------------------------

PCB Contact Termination Area Plating Material Finish	Bright
--	--------

Contact Shape & Form	Square
----------------------	--------

Contact Underplating Material	Nickel
-------------------------------	--------

PCB Contact Termination Area Plating Material	Tin
---	-----

Contact Base Material	Brass
-----------------------	-------

Contact Mating Area Plating Material	Gold
--------------------------------------	------

Contact Mating Area Plating Material Thickness	.38 μ m[14.96 μ in]
--	-----------------------------

Contact Type	Pin
--------------	-----

Contact Current Rating (Max)	2 A
------------------------------	-----

Termination Features

Square Termination Post & Tail Dimension	.5 mm[.02 in]
--	---------------

Termination Post & Tail Length	2.8 mm[.11 in]
--------------------------------	----------------

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

Housing Features

Centerline (Pitch)	2 mm[.079 in]
--------------------	---------------

Housing Material	PA9T GF
------------------	---------

Dimensions

Connector Length	20 mm[.787 in]
------------------	----------------

Connector Width	2 mm[.079 in]
-----------------	---------------

PCB Thickness (Recommended)	1.6 mm[.063 in]
-----------------------------	-----------------

Usage Conditions

Housing Temperature Rating	High
----------------------------	------

Operating Temperature Range	-40 - 125 $^{\circ}$ C[-40 - 257 $^{\circ}$ F]
-----------------------------	--

Operation/Application

Assembly Process Feature	Without Pick and Place Cover
--------------------------	------------------------------



Circuit Application

Signal

Industry Standards

UL Rating

Recognized

Compatible With Agency/Standards Products

UL

Compatible With Approved Standards Products

UL E28476

UL Flammability Rating

UL 94V-0

Packaging Features

Packaging Method

Box

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024 (240)
 Candidate List Declared Against: JAN 2024 (240)
 Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

 <p>TE Part # 1-2316102-0 10P,2MM,REC,HSG,SR,CRIMP,PLAIN,BOX</p>	 <p>TE Part # 1-2307726-0 10P,2MM,B-B,REC,SRHZ,SMD,0.38AU,TR</p>	 <p>TE Part # 1-2307707-0 10P,2MM,B-B,REC,SRHZ,2.8,0.38AU,TB</p>	 <p>TE Part # 1-2314937-0 10P,2MM,B-B,REC,SRHZ,2.8,0.38AU,TR</p>
 <p>TE Part # 1-2314849-0 10P,2MM,BB,REC,SRVT,SMD,AU.38,TB,W/CP</p>	 <p>TE Part # 1-2307814-0 10P,2MM,BB,REC,SRVT,SMD,AU.38,TR,W/CP</p>	 <p>TE Part # 1-2314869-0 10P,2MM,BB,REC,SRVT,2.0,0.38AU,TB,W/CP</p>	 <p>TE Part # 1-2307770-0 10P,2MM,BB,REC,SRVT,2.0,0.38AU,TR,W/CP</p>
 <p>TE Part # 1-2314877-0 10P,2MM,B-B,REC,SRVT,2.7,0.38AU,TB</p>	 <p>TE Part # 1-2314881-0 10P,2MM,BB,REC,SRVT,2.7,0.38AU,TB,W/CP</p>	 <p>TE Part # 1-2307771-0 10P,2MM,BB,REC,SRVT,2.7,0.38AU,TR,W/CP</p>	 <p>TE Part # 1-2307772-0 10P,2MM,B-B,REC,SRVT,3.2,0.38AU,TUBE</p>
 <p>TE Part # 1-2317205-0 10P,2MM,REC,IDC,PLAIN,26-30,STRIP,Au0.38</p>	 <p>TE Part # 1-2314945-0 10P,2MM,B-B,REC,SRHZ,SMD,0.38AU,TB</p>	 <p>TE Part # 1-2314929-0 10P,2MM,B-B,REC,SRHZ,2.1,0.38AU,TB</p>	 <p>TE Part # 1-2307706-0 10P,2MM,B-B,REC,SRHZ,2.1,0.38AU,TR</p>
 <p>TE Part # 1-2307708-0 10P,2MM,B-B,REC,SRHZ,3.4,0.38AU,TUBE</p>	 <p>TE Part # 1-2314901-0 10P,2MM,REC,SRVT,OTR,2.3,0.38AU,TB,W/CP</p>	 <p>TE Part # 1-2307838-0 10P,2MM,REC,SRVT,OTR,2.3,0.38AU,TR,W/CP</p>	 <p>TE Part # 1-2314909-0 10P,2MM,B-B,REC,SRVT,OTR,2.8,0.38AU,TB</p>

Also in the Series | [AMPMODU 2 mm](#)



Connector Contacts(27)

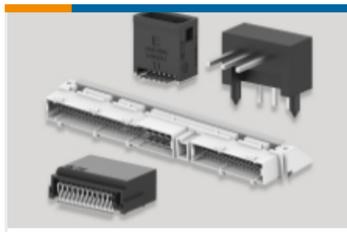


PCB Headers & Receptacles(10387)



Wire-to-Board Connector Assemblies & Housings(202)

Customers Also Bought

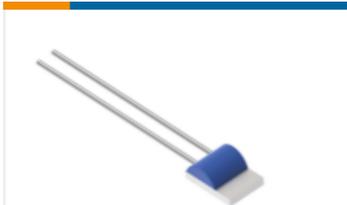

TE Part # NB-PTCO-161
Pt100, 2.0x2.3, Class A, PTFC101A1A0



TE Part # 205563-2
RECEPT ASSY,50 POSN,AMPLIMITE



TE Part # 1-1393114-1
KUEP-7D15-24=KU



TE Part # 1757823-7
AMPLIMITE,ASY,PLUG,STD,90,ZN,1,CT



TE Part # 1757824-7
AMPLIMITE,ASY,RCPT,STD,90,ZN,1,CT



TE Part # 7536494002
RT555-1/8-0-SP



TE Part # 1-1757823-2
AMPLIMITE,ASY,PLUG,STD,90,ZN,6,CT



TE Part # 1-1757823-0
AMPLIMITE,ASY,PLUG,STD,90,ZN,4,CT



TE Part # 91537-1
CCII .100 FFC PIN REC 26-22 ASSY



TE Part # 1623916-7
3203X 20K

Documents

CAD Files

[3D PDF](#)

[3D](#)

Customer View Model

[ENG_CVM_CVM_1-2355181-0_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-2355181-0_A.3d_igs.zip](#)

1-2355181-0

PCB Mount Header, Vertical, Board-to-Board, 10 Position, 2 mm [.079 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, AMPMODU 2 mm



English

Customer View Model

[ENG_CVM_CVM_1-2355181-0_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English