


AMP CT

TE Internal #: 3-292173-6

PCB Mount Header, Right Angle, Wire-to-Board, 6 Position, 2 mm [.079 in] Centerline, Partially Shrouded, Tin, Surface Mount, Power & Signal, AMP CT

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles > AMP COMMON TERMINATION HEADERS

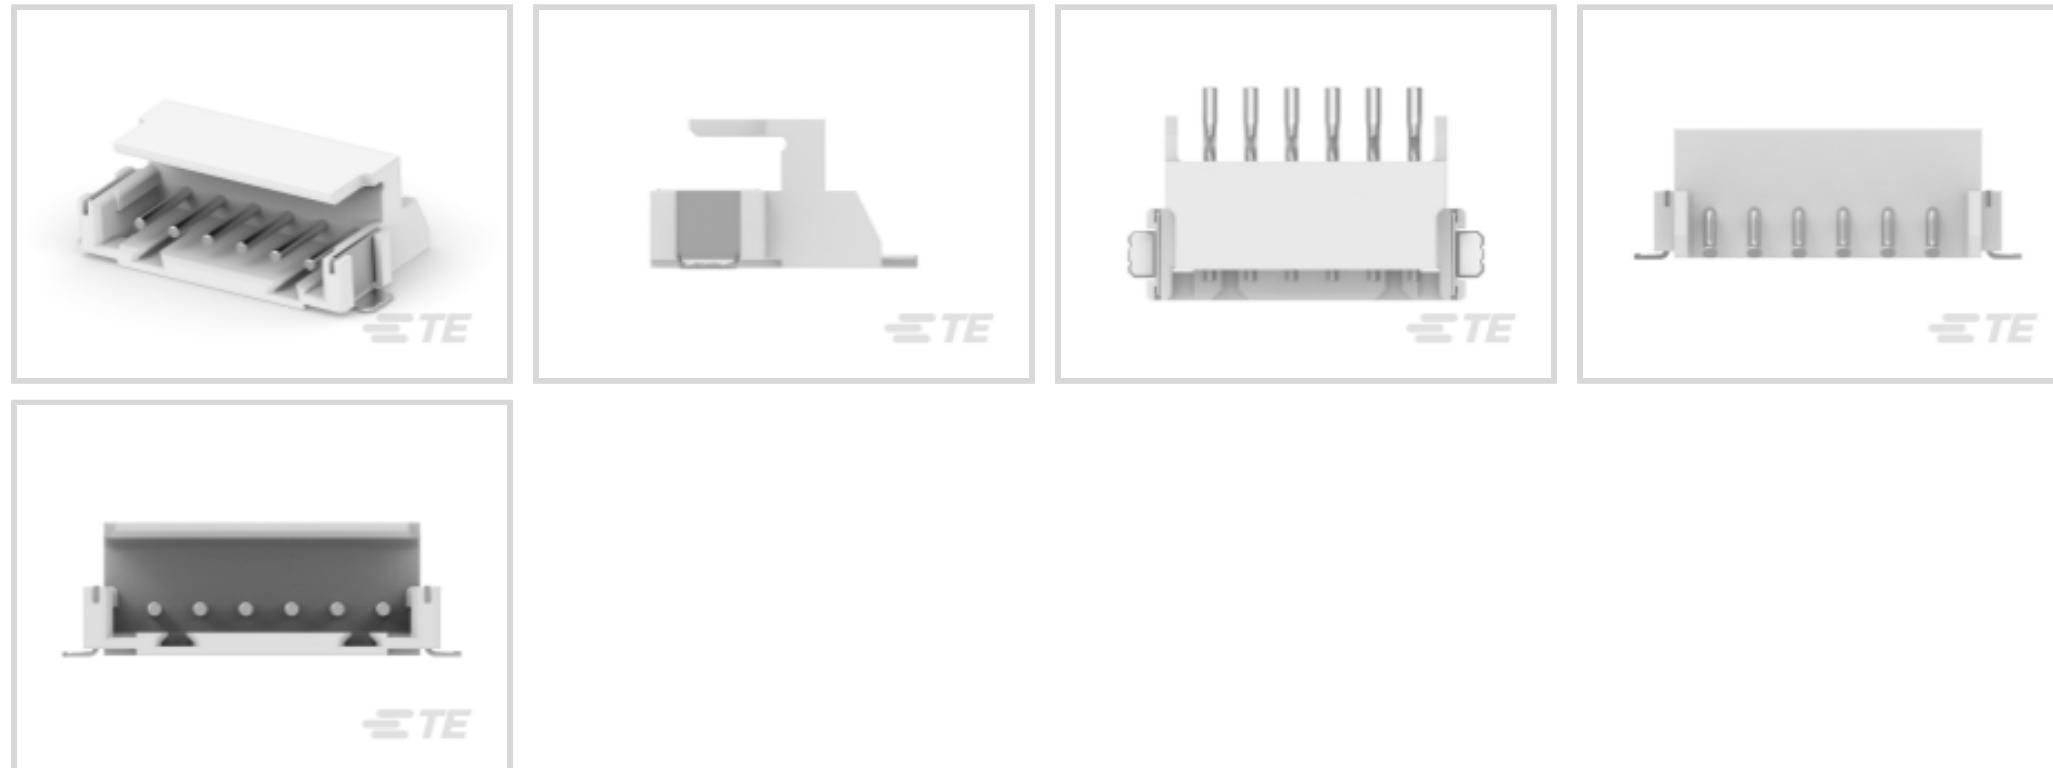

Connector System: **Wire-to-Board**

Number of Positions: **6**

Number of Rows: **1**

Centerline (Pitch): **2 mm [.079 in]**

PCB Mount Orientation: **Right Angle**

[All AMP COMMON TERMINATION HEADERS \(33\)](#)

Features

Product Type Features

| | |
|-----------------------------------|-----------------------|
| Connector System | Wire-to-Board |
| Header Type | Partially Shrouded |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |
| PCB Connector Assembly Type | PCB Mount Header |

Configuration Features

| | |
|-----------------------|-------------|
| Number of Positions | 6 |
| Number of Rows | 1 |
| PCB Mount Orientation | Right Angle |

Electrical Characteristics

| | |
|-------------------|---------|
| Operating Voltage | 125 VAC |
|-------------------|---------|

Body Features

Primary Product Color

Natural

Contact Features

| | |
|---|---------------------------------------|
| Contact Mating Area Length | 4.2 mm[.165 in] |
| PCB Contact Termination Area Plating Material Thickness | 1 - 2 μ m[39.37 - 78.73 μ in] |
| Contact Layout | Inline |
| Mating Pin Diameter | .6 mm[.024 in] |
| Contact Shape & Form | Round |
| PCB Contact Termination Area Plating Material | Tin |
| Contact Base Material | Brass |
| Contact Mating Area Plating Material | Tin |
| Contact Type | Pin |
| Contact Current Rating (Max) | 4 A |

Termination Features

| | |
|---|----------------|
| Round Termination Post & Tail Diameter | .6 mm[.024 in] |
| Termination Method to Printed Circuit Board | Surface Mount |

Mechanical Attachment

| | |
|--------------------------|--------------|
| Mating Alignment Type | Polarization |
| Mating Retention | Without |
| Panel Mount Feature | With |
| PCB Mount Retention Type | Solder Peg |
| Connector Mounting Type | Board Mount |
| Mating Alignment | With |
| PCB Mount Alignment | Without |
| PCB Mount Retention | With |

Housing Features

| | |
|--------------------|---------------|
| Housing Material | 6T PA(GF) |
| Centerline (Pitch) | 2 mm[.079 in] |

Dimensions

| | |
|-----------------------------|-----------------------|
| Connector Length | 13.8 mm[.543 in] |
| Connector Height | 5.8 mm[.228 in] |
| Connector Width | 9 mm[.354 in] |
| PCB Thickness (Recommended) | .8 mm[.031 - .063 in] |

Usage Conditions

| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | -40 - 105 °C [-40 - 221 °F] |
|-----------------------------|-----------------------------|

Operation/Application

| | |
|--------------------------|----------------------|
| Assembly Process Feature | Pick and Place Cover |
| Circuit Application | Power & Signal |

Industry Standards

| | |
|---|-----------------------|
| Compatible With Agency/Standards Products | CSA, UL |
| Compatible With Approved Standards Products | CSA LR7189, UL E28476 |
| UL Flammability Rating | UL 94V-0 |

Packaging Features

| | |
|--------------------|-----------|
| Packaging Quantity | 500 |
| Packaging Method | Box, Tape |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Reflow solder capable to 245°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-AM7017-C7671
 Common Termination Contacts -
 POWER TRIPLE LOCK




TE Part # CAT-AM7017-H8172
 AMP COMMON TERMINATION
 HOUSINGS




TE Part # 1-353293-3
 MINI CT MT REC ASSY 13P GRAY

Also in the Series

AMP CT

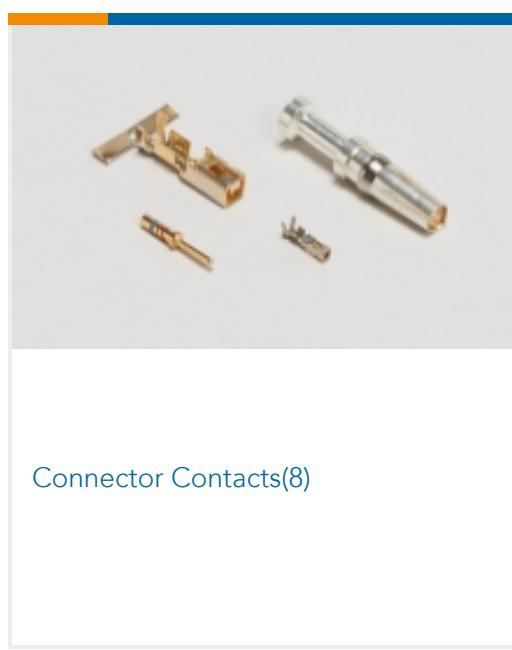


Connector Contacts(8)

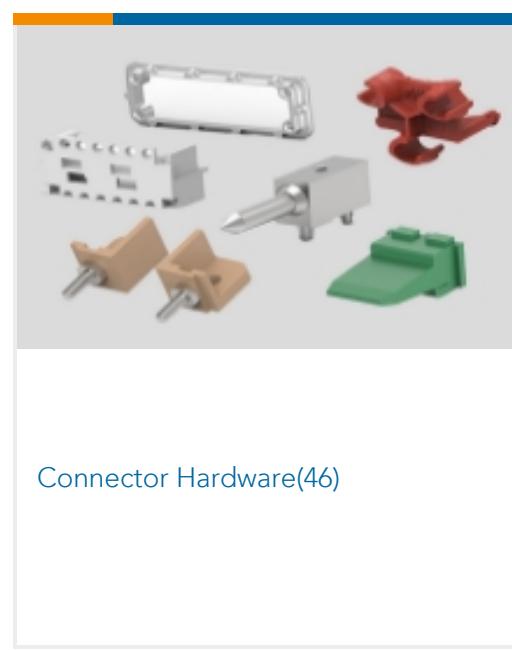

Connector Hardware(46)



PCB Headers & Receptacles(756)

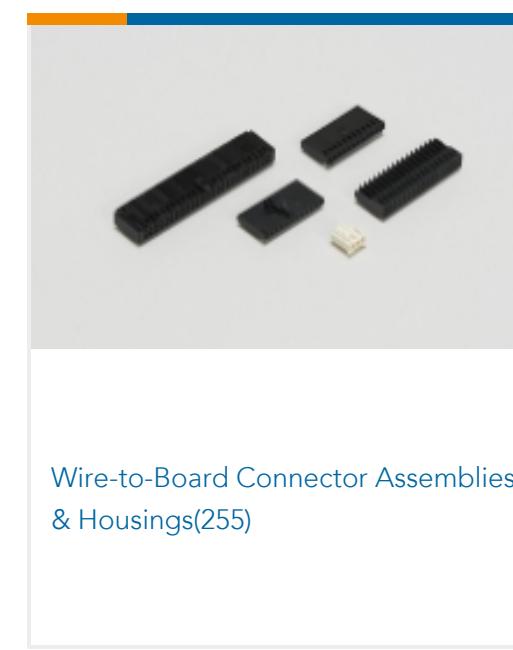

Wire-to-Board Connector Assemblies
 & Housings(255)

Customers Also Bought



TE Part # 440055-6
 2.0MM,HDR,6POS,R/A




TE Part # 179228-6
 CRIMP TYPE II RECPT HSG



TE Part # 440129-5
 2.0MM,HSG,5POS



TE Part # 1416250-8
 V23092B1024X75

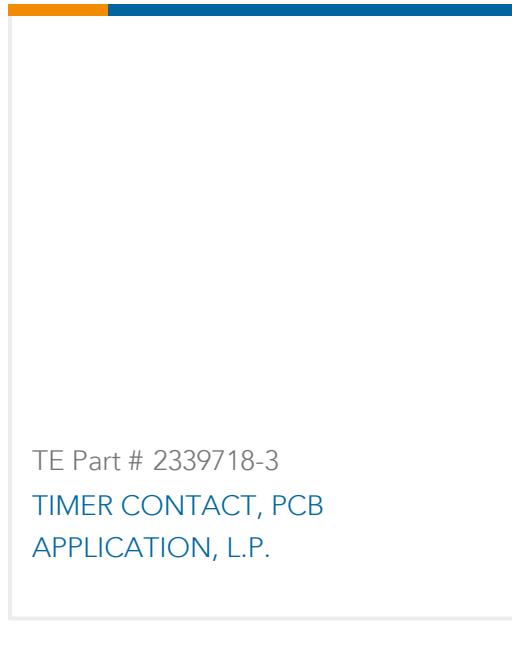

TE Part # 2339718-3
 TIMER CONTACT, PCB
 APPLICATION, L.P.

Documents

CAD Files

3D PDF

3D

Customer View Model[ENG_CVM_CVM_3-292173-6_B.2d_dxf.zip](#)

English

Customer View Model[ENG_CVM_CVM_3-292173-6_B.3d_igs.zip](#)

English

Customer View Model[ENG_CVM_CVM_3-292173-6_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.**Product Specifications**[Product Specification](#)

English

AMP COMMON TERMINATION (CT), CONNECTOR, 2mm PITCH, M/T TYPE, LEAD FREE VERSION

Japanese

[Product Specification](#)

Japanese

Agency Approvals[CSA Certificate](#)

English