

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Knife-disconnect terminal block, nom. voltage: 500 V, nominal current: 20 A, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 6 mm<sup>2</sup>, mounting: NS 35/7,5, NS 35/15, color: blue

## Your advantages

- Double bridge shaft enables individual potential distribution and supply
- Compact design and high current carrying capacity of 20 A

## Commercial data

Item number	3073018
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE01
Product key	BE1131
Catalog page	Page 166 (C-1-2019)
GTIN	4046356333894
Weight per piece (including packing)	15.97 g
Weight per piece (excluding packing)	15.97 g
Customs tariff number	85369010
Country of origin	PL

# UT 4-TWIN-MT BU - Knife-disconnect terminal block

3073018

<https://www.phoenixcontact.com/us/products/3073018>



## Technical data

### Product properties

Product type	Disconnect terminal block
Number of connections	3
Number of rows	1

### Data management status

Article revision	05
------------------	----

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W

### Connection data

Number of connections per level	3
Nominal cross section	4 mm <sup>2</sup>

### Level 1 above 1 below 1

Screw thread	M3
Tightening torque	0.6 ... 0.8 Nm
Stripping length	9 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Cross section AWG	26 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	26 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with same cross section, solid	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with same cross section, flexible	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Nominal current	20 A (with 6 mm <sup>2</sup> conductor cross section)
Maximum load current	20 A (with 6 mm <sup>2</sup> conductor cross section)
Nominal voltage	500 V
Nominal cross section	4 mm <sup>2</sup>

### Dimensions

# UT 4-TWIN-MT BU - Knife-disconnect terminal block

3073018

<https://www.phoenixcontact.com/us/products/3073018>



Width	6.2 mm
End cover width	2.2 mm
Height	65.4 mm
Depth on NS 35/7,5	49.1 mm
Depth on NS 35/15	56.6 mm

## Material specifications

Color	blue
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Mechanical properties

Mechanical data	
Open side panel	Yes

## Environmental and real-life conditions

Ambient conditions	
Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
---------------	-----------

# UT 4-TWIN-MT BU - Knife-disconnect terminal block

3073018

<https://www.phoenixcontact.com/us/products/3073018>



NS 35/15

# UT 4-TWIN-MT BU - Knife-disconnect terminal block


3073018

<https://www.phoenixcontact.com/us/products/3073018>



## Drawings

Circuit diagram

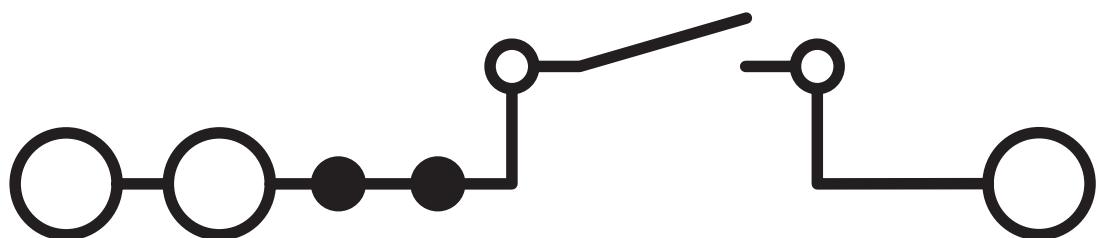

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3073018>

		CSA		
		Approval ID: 13631		
		Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG
Use group B		300 V	16 A	26 - 10
Use group C		150 V	16 A	26 - 10
Use group D		300 V	10 A	26 - 10

		IECEE CB Scheme		
		Approval ID: DE1-62910		
		Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG
		500 V	20 A	-

		EAC		
		Approval ID: RU C-DE.BL08.B.00534		

		cULus Recognized		
		Approval ID: E60425		
		Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG
Use group B		300 V	16 A	26 - 10
Multi-conductor connection		300 V	16 A	26 - 14
Use group C		150 V	16 A	26 - 10
Use group D		300 V	10 A	26 - 10

		VDE Zeichengenehmigung		
		Approval ID: 40041930		
		Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG
		500 V	20 A	-

# UT 4-TWIN-MT BU - Knife-disconnect terminal block

3073018

<https://www.phoenixcontact.com/us/products/3073018>



## Classifications

### ECLASS

ECLASS-11.0	27141126
ECLASS-12.0	27141126
ECLASS-13.0	27250108

### ETIM

ETIM 9.0	EC000902
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# UT 4-TWIN-MT BU - Knife-disconnect terminal block

3073018

<https://www.phoenixcontact.com/us/products/3073018>



## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	d222d59e-1491-4e83-815e-8aab7dcd1e35

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## Accessories

 Note: Applying some accessories below might limit this product.

### FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/us/products/3030336>

Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red



 Max. current carrying capacity: 20 A

### FBS 3-6 - Plug-in bridge

3030242

<https://www.phoenixcontact.com/us/products/3030242>

Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red



 Max. current carrying capacity: 20 A

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## FBS 4-6 - Plug-in bridge

3030255

<https://www.phoenixcontact.com/us/products/3030255>

Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red



Max. current carrying capacity: 20 A

---

## FBS 5-6 - Plug-in bridge

3030349

<https://www.phoenixcontact.com/us/products/3030349>

Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red



Max. current carrying capacity: 20 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## FBS 6-6 - Plug-in bridge

1008238

<https://www.phoenixcontact.com/us/products/1008238>

Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red



Max. current carrying capacity: 20 A

---

## FBS 10-6 - Plug-in bridge

3030271

<https://www.phoenixcontact.com/us/products/3030271>

Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red



Max. current carrying capacity: 20 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## FBS 20-6 - Plug-in bridge

3030365

<https://www.phoenixcontact.com/us/products/3030365>

Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red



Max. current carrying capacity: 20 A

---

## FBS 50-6 - Plug-in bridge

3032224

<https://www.phoenixcontact.com/us/products/3032224>

Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: red



Max. current carrying capacity: 20 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## FBSR 2-6 - Plug-in bridge

3033715

<https://www.phoenixcontact.com/us/products/3033715>

Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red



Max. current carrying capacity: 20 A

---

## FBSR 3-6 - Plug-in bridge

3001594

<https://www.phoenixcontact.com/us/products/3001594>

Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red



Max. current carrying capacity: 20 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## FBSR 4-6 - Plug-in bridge

3001595

<https://www.phoenixcontact.com/us/products/3001595>

Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red



Max. current carrying capacity: 20 A

---

## FBSR 5-6 - Plug-in bridge

3001596

<https://www.phoenixcontact.com/us/products/3001596>

Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red



Max. current carrying capacity: 20 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## FBSR 10-6 - Plug-in bridge

3033716

<https://www.phoenixcontact.com/us/products/3033716>

Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red



Max. current carrying capacity: 20 A

---

## FBSRH 2-6 - Short-circuit connector

3033812

<https://www.phoenixcontact.com/us/products/3033812>

Short-circuit connector, pitch: 6.2 mm, number of positions: 2, color: red



Max. current carrying capacity: 20 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/us/products/3036932>

Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue



Max. current carrying capacity: 20 A

---

## FBS 3-6 BU - Plug-in bridge

3036945

<https://www.phoenixcontact.com/us/products/3036945>

Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue



Max. current carrying capacity: 20 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## FBS 4-6 BU - Plug-in bridge

3036958

<https://www.phoenixcontact.com/us/products/3036958>

Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue



Max. current carrying capacity: 20 A

---

## FBS 5-6 BU - Plug-in bridge

3036961

<https://www.phoenixcontact.com/us/products/3036961>

Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue



Max. current carrying capacity: 20 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## FBS 10-6 BU - Plug-in bridge

3032198

<https://www.phoenixcontact.com/us/products/3032198>

Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue



Max. current carrying capacity: 20 A

---

## FBS 20-6 BU - Plug-in bridge

3032208

<https://www.phoenixcontact.com/us/products/3032208>

Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue



Max. current carrying capacity: 20 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## FBS 50-6 BU - Plug-in bridge

3032211

<https://www.phoenixcontact.com/us/products/3032211>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue

Max. current carrying capacity: 20 A

---

## RB ST 10-(2,5/4) - Reducing bridge

3030873

<https://www.phoenixcontact.com/us/products/3030873>



Reducing bridge, pitch: 10 mm, number of positions: 2, length: 36 mm, color: red

Max. current carrying capacity: 35 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## RB UT 10-(2,5/4) - Reducing bridge

3047060

<https://www.phoenixcontact.com/us/products/3047060>



Reducing bridge, pitch: 10.2 mm, number of positions: 2, length: 29 mm, color: red

Max. current carrying capacity: 40 A

---

## RB UT 35-(2,5/4) - Reducing bridge

3047277

<https://www.phoenixcontact.com/us/products/3047277>

Reducing bridge, pitch: 11 mm, number of positions: 2, color: red



Max. current carrying capacity: 40 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## RB UT 16-(2,5/4) - Reducing bridge

3047073

<https://www.phoenixcontact.com/us/products/3047073>

Reducing bridge, pitch: 11 mm, number of positions: 2, length: 31 mm, color: red



 Max. current carrying capacity: 40 A

---

## RB UT 6-(2,5/4) - Reducing bridge

3047251

<https://www.phoenixcontact.com/us/products/3047251>

Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 25 mm, color: red



 Max. current carrying capacity: 40 A

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## D-UT 2,5/4-QUATTRO - End cover

3047170

<https://www.phoenixcontact.com/us/products/3047170>

End cover, depth: 39.8 mm, width: 2.2 mm, height: 64.4 mm, color: gray



---

## S-MT - Switching lock

3247954

<https://www.phoenixcontact.com/us/products/3247954>

Switching lock, depth: 23.1 mm, width: 3.5 mm, height: 10.5 mm, color: white



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

LPS-6/E - Service connector

3270540

<https://www.phoenixcontact.com/us/products/3270540>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: red

LPS-6 - Service connector

3270541

<https://www.phoenixcontact.com/us/products/3270541>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: red

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## LPO 4/E - Pick-off plug

3270519

<https://www.phoenixcontact.com/us/products/3270519>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## LPO 4 - Pick-off plug

3270522

<https://www.phoenixcontact.com/us/products/3270522>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



---

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>

DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

---

PAI-4-FIX-5/6 BU - Test adapter

3035975

<https://www.phoenixcontact.com/us/products/3035975>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## PAI-4-FIX-5/6 OG - Test adapter

3035974

<https://www.phoenixcontact.com/us/products/3035974>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



## PAI-4-FIX-5/6 YE - Test adapter

3035977

<https://www.phoenixcontact.com/us/products/3035977>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## PAI-4-FIX-5/6 RD - Test adapter

3035976

<https://www.phoenixcontact.com/us/products/3035976>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



## PAI-4-FIX-5/6 GN - Test adapter

3035978

<https://www.phoenixcontact.com/us/products/3035978>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## PAI-4-FIX-5/6 BK - Test adapter

3035980

<https://www.phoenixcontact.com/us/products/3035980>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



## PAI-4-FIX-5/6 GY - Test adapter

3035982

<https://www.phoenixcontact.com/us/products/3035982>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## PAI-4-FIX-5/6 VT - Test adapter

3035979

<https://www.phoenixcontact.com/us/products/3035979>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



## PAI-4-FIX-5/6 BN - Test adapter

3035981

<https://www.phoenixcontact.com/us/products/3035981>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## PAI-4-FIX-5/6 WH - Test adapter

3035983

<https://www.phoenixcontact.com/us/products/3035983>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



## PS-6 - Test plug

3030996

<https://www.phoenixcontact.com/us/products/3030996>

Test plug, Modular test plug, number of positions: 1, color: red



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## PS-6/2,3MM RD - Test plug

3038736

<https://www.phoenixcontact.com/us/products/3038736>

Test plug, number of positions: 1, color: red



---

## P-DI - Isolating plug

3036783

<https://www.phoenixcontact.com/us/products/3036783>

Isolating plug, depth: 23.1 mm, width: 3.5 mm, height: 10.8 mm, color: orange



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## P-DI GY - Isolating plug

3047390

<https://www.phoenixcontact.com/us/products/3047390>

Isolating plug, depth: 23.1 mm, width: 3.5 mm, height: 10.8 mm, color: gray



---

## P-FIX - Feed-through connector

3038956

<https://www.phoenixcontact.com/us/products/3038956>

Feed-through connector, width: 4 mm, height: 10.5 mm, color: gray



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## P-CO - Component connector

3036796

<https://www.phoenixcontact.com/us/products/3036796>



Component connector, for installing components that can be individually selected, nom. voltage: 250 V, nominal current: 6 A, connection method: Plug-in connection, pitch: 5.2 mm, depth: 33.2 mm, width: 5.1 mm, height: 24.2 mm, number of positions: 1, color: gray, mounting type: Pluggable (slot)

## P-CO 1N4007/R-L - Component connector

3032457

<https://www.phoenixcontact.com/us/products/3032457>



Component connector, with diode1N4007, depth: 33.3 mm, width: 5.2 mm, height: 24.2 mm, number of positions: 1, color: gray, mounting type: Plug-in mounting

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## P-CO 1N4007/L-R - Component connector

3032460

<https://www.phoenixcontact.com/us/products/3032460>



Component connector, with diode1N4007, depth: 33.3 mm, width: 5.2 mm, height: 24.2 mm, number of positions: 1, color: gray, mounting type: Plug-in mounting

## P-DI GN - Isolating plug

1071062

<https://www.phoenixcontact.com/us/products/1071062>

Isolating plug, depth: 23.1 mm, width: 3.5 mm, height: 10.8 mm, color: green



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## P-CO XL - Component connector

3036797

<https://www.phoenixcontact.com/us/products/3036797>



Component connector, for installing components that can be individually selected up to a diameter of 10 mm and power dissipation of up to 1 W, nom. voltage: 400 V, nominal current: 10 A, connection method: Plug-in connection, depth: 37.5 mm, width: 12.3 mm, height: 41.2 mm, number of positions: 1, color: gray, mounting type: Pluggable (slot)

## P-CO XL SKN - Component connector

3036798

<https://www.phoenixcontact.com/us/products/3036798>



Component connector, specifically for holding the SKN 2,5 diode, nom. voltage: 400 V, nominal current: 1.25 A, connection method: Plug-in connection, depth: 37.5 mm, width: 12.3 mm, height: 41.2 mm, number of positions: 1, color: gray, mounting type: Pluggable (slot)

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## P-FU 5X20 - Fuse plug

3036806

<https://www.phoenixcontact.com/us/products/3036806>



Fuse plug, Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block., nom. voltage: 500 V, nominal current: 6.3 A, connection method: Plug-in connection, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

## P-FU 5X20 LED 24-EX - Fuse plug

3036821

<https://www.phoenixcontact.com/us/products/3036821>



Fuse plug, Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block., nom. voltage: 24 V, nominal current: 6.3 A, fuse type: G / 5 x 20, color: black

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## P-FU 5X20 LED 24 - Fuse plug

3036819

<https://www.phoenixcontact.com/us/products/3036819>



Fuse plug, Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block., nom. voltage: 24 V, nominal current: 6.3 A, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

## P-FU 5X20 LED 60 - Fuse plug

3036822

<https://www.phoenixcontact.com/us/products/3036822>



Fuse plug, Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block., nom. voltage: 500 V, nominal current: 6.3 A, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## P-FU 5X20 LA 250 - Fuse plug

3036835

<https://www.phoenixcontact.com/us/products/3036835>



Fuse plug, Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block., nom. voltage: 500 V, nominal current: 6.3 A, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

## P-FU 5X20 LED 24 120KOHM - Fuse plug

3036820

<https://www.phoenixcontact.com/us/products/3036820>



Fuse plug, Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block., nom. voltage: 24 V, nominal current: 6.3 A, fuse type: G / 5 x 20, color: black

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## P-FU 5X20 LED 24 820KOHM - Fuse plug

3036825

<https://www.phoenixcontact.com/us/products/3036825>



Fuse plug, Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block., nom. voltage: 24 V, nominal current: 6.3 A, fuse type: G / 5 x 20, color: black

## P-FU 5X20 LED 24-5 - Fuse plug

3209248

<https://www.phoenixcontact.com/us/products/3209248>



Fuse plug, Suitable for terminal blocks with a width of 5.2 mm and above with TG zone, nom. voltage: 24 V, nominal current: 6.3 A, connection method: Plug-in connection, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

P-FU 5X20 LED 24-5 120KOHM - Fuse plug

3209240

<https://www.phoenixcontact.com/us/products/3209240>



Fuse plug, Suitable for terminal blocks with a width of 5.2 mm and above with TG zone, nom. voltage: 24 V, nominal current: 6.3 A, fuse type: G / 5 x 20, color: black

P-FU 5X20 LED 250-5 - Fuse plug

3209264

<https://www.phoenixcontact.com/us/products/3209264>



Fuse plug, Suitable for terminal blocks with a width of 5.2 mm and above with TG zone, nom. voltage: 250 V, nominal current: 6.3 A, connection method: Plug-in connection, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## P-FU 5X20 LED 60-5 - Fuse plug

3209251

<https://www.phoenixcontact.com/us/products/3209251>



Fuse plug, Suitable for terminal blocks with a width of 5.2 mm and above with TG zone, nom. voltage: 250 V, nominal current: 6.3 A, connection method: Plug-in connection, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

## P-FU 5X20-5 - Fuse plug

3209235

<https://www.phoenixcontact.com/us/products/3209235>



Fuse plug, Suitable for terminal blocks with a width of 5.2 mm and above with TG zone, nom. voltage: 400 V, nominal current: 6.3 A, connection method: Plug-in connection, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



---

## CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



## PAI-4-N GY - Test adapter

3032871

<https://www.phoenixcontact.com/us/products/3032871>

4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch



# UT 4-TWIN-MT BU - Knife-disconnect terminal block



3073018

<https://www.phoenixcontact.com/us/products/3073018>

## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>

Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip



## SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>

Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

[info@phoenixcon.com](mailto:info@phoenixcon.com)