

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 8+PE, size: COM, power contacts: 8, control contacts: 0, number of connections per position: 1, Socket, Crimp connection, 500 V, 16 A, 0.5 mm² ... 4 mm², application: Power, Only suitable for plastic housings

Product description

Contact insert, incl. 4 mounting screws

Commercial data

Item number	1408494
Packing unit	2 pc
Minimum order quantity	2 pc
Sales key	BF61
Product key	BF7ABH
Catalog page	Page 649 (C-2-2017)
GTIN	4046356618205
Weight per piece (including packing)	16.4 g
Weight per piece (excluding packing)	16.35 g
Customs tariff number	85389099
Country of origin	CN

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

Technical data

Notes

General	For crimp contacts CK2,5-ED...
General	Connectors may be operated only when there is no load/voltage.

Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required
---------------	---


Product properties

Product type	Contact insert with a fixed no. of positions
Series	HC-COM
Application	Power
Type	COM
Number of positions	8
Connection profile	8+PE
Contact numbering	1 - 8
Number of connections per position	1
No. of power contacts	8
No. of control contacts	0
Contact material type	turned

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	22.4 mm
Height	38.5 mm
Length	41.6 mm

Mechanical characteristics

Contact diameter	2.5 mm
------------------	--------

Connection data

Connection technology

Connection technology	Crimp connection
Number of connections per position	1

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

Connection in acc. with standard	IEC / EN
----------------------------------	----------

Conductor connection

Conductor cross section	0.5 mm ² ... 4 mm ²
Connection cross section AWG	20 ... 12
Stripping length of the individual wire	7.5 mm

Electrical properties

Rated voltage (III/3)	500 V
Rated voltage for power contacts	500
Rated surge voltage	6 kV
Rated current	16 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PC

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 100 °C (including heating up of contacts)
---------------------------------	--


HC-COM- 8-EBUC - Contact insert




1408494

<https://www.phoenixcontact.com/us/products/1408494>

Drawings

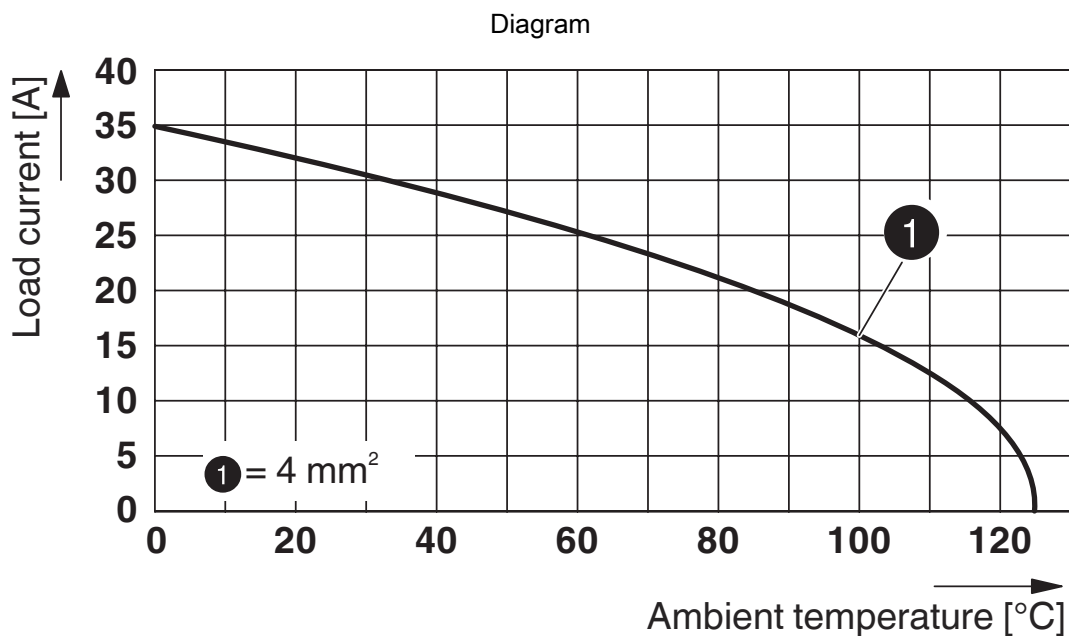

Derating diagram for 4 mm²

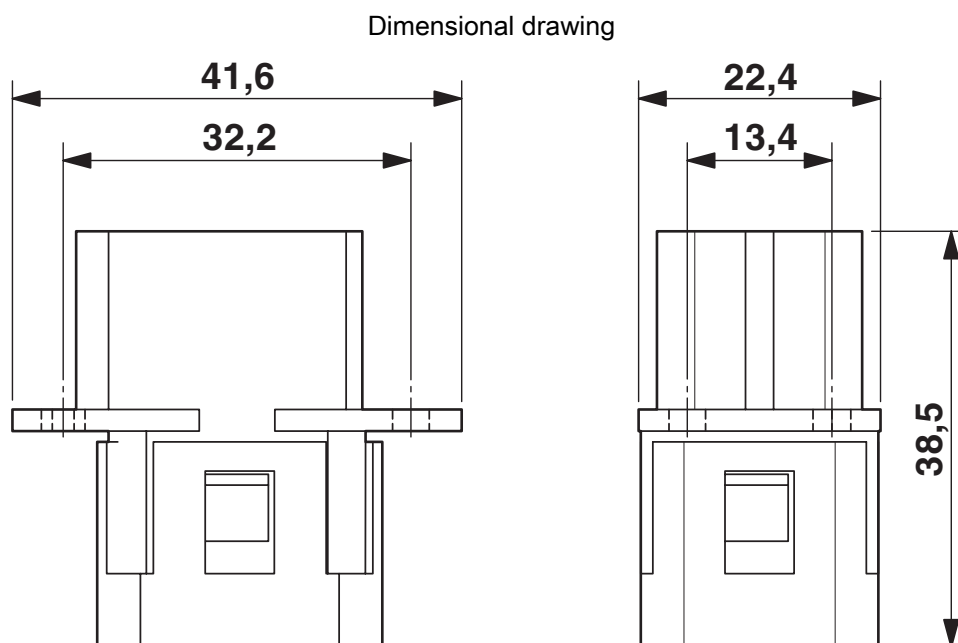

HC-COM-8-EBUC dimensional drawing


HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



Schematic diagram

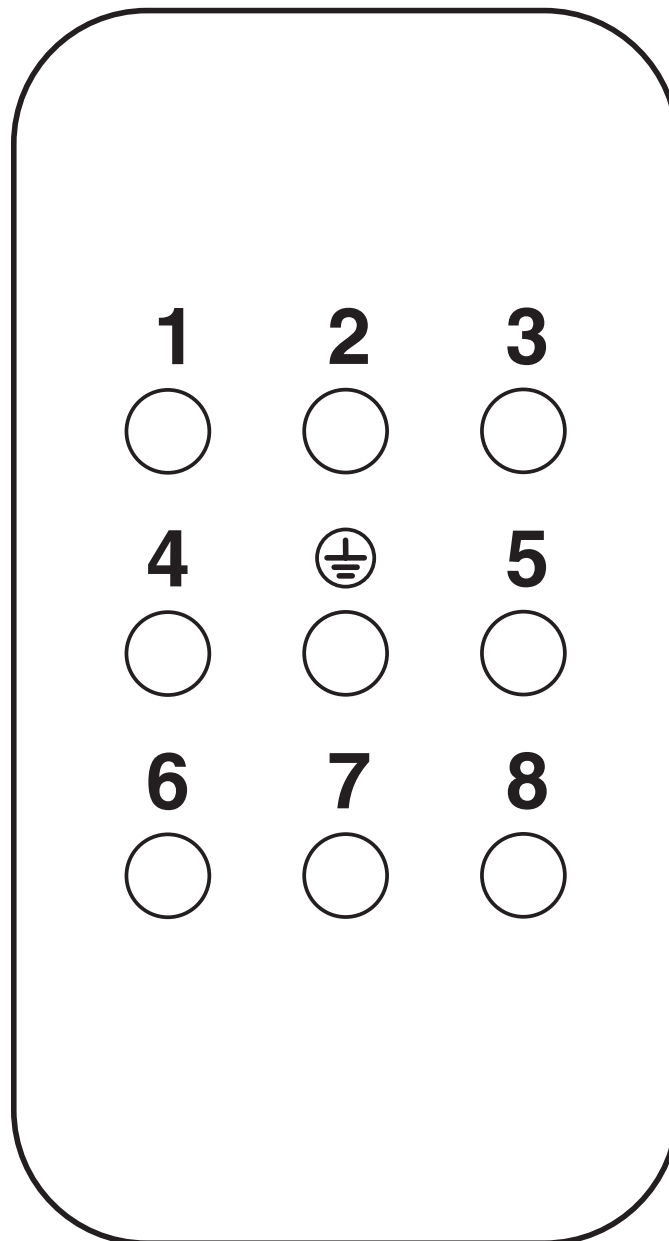

Connector pin assignment, connection side

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1408494>

 CSA Approval ID: 260458				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	19 A	20 - 12	-

 cUL Recognized Approval ID: FILE E 118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	-	20 - 12	-

 UL Recognized Approval ID: FILE E 118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	-	20 - 12	-

 EAC Approval ID: RU C-DE.AI30.B.01102				
---	--	--	--	--

 EAC Approval ID: RU C-DE.BL08.B.00511				
---	--	--	--	--

cULus Recognized				
-------------------------	--	--	--	--

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-12.0	27440205
ECLASS-13.0	27440205

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



Accessories

HC-CP-CK2.5-PL - Coding element

1095419

<https://www.phoenixcontact.com/us/products/1095419>

Dummy socket for contact carrier with turned CK 2,5-ED... socket contacts. For HC-A../HC-BB../HC-M... series contact inserts.



CK2,5-ED-0,50BU AG - Crimp contact

1663640

<https://www.phoenixcontact.com/us/products/1663640>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-0,75BU AG - Crimp contact

1663653

<https://www.phoenixcontact.com/us/products/1663653>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

CK2,5-ED-1,00BU AG - Crimp contact

1663666

<https://www.phoenixcontact.com/us/products/1663666>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.75 mm² ... 1 mm², AWG 18

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-1,50BU AG - Crimp contact

1663679

<https://www.phoenixcontact.com/us/products/1663679>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

CK2,5-ED-2,50BU AG - Crimp contact

1663682

<https://www.phoenixcontact.com/us/products/1663682>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-3,00BU AG - Crimp contact

1663695

<https://www.phoenixcontact.com/us/products/1663695>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 3 mm² ... 3 mm², AWG 12

CK2,5-ED-4,00BU AG - Crimp contact

1663705

<https://www.phoenixcontact.com/us/products/1663705>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 4 mm² ... 4 mm², AWG 12

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-0,50F AG - Crimp contact

1273612

<https://www.phoenixcontact.com/us/products/1273612>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

CK2,5-ED-0,75F AG - Crimp contact

1273611

<https://www.phoenixcontact.com/us/products/1273611>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-1,00F AG - Crimp contact

1273610

<https://www.phoenixcontact.com/us/products/1273610>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

CK2,5-ED-1,50F AG - Crimp contact

1273609

<https://www.phoenixcontact.com/us/products/1273609>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-2,50F AG - Crimp contact

1273607

<https://www.phoenixcontact.com/us/products/1273607>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

CK2,5-ED-3,00F AG - Crimp contact

1273606

<https://www.phoenixcontact.com/us/products/1273606>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 3 mm² ... 3 mm², AWG 12

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-4,00F AG - Crimp contact

1273604

<https://www.phoenixcontact.com/us/products/1273604>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 4 mm² ... 4 mm², AWG 12

CK2,5-ED-0,37BU AU - Crimp contact

1585647

<https://www.phoenixcontact.com/us/products/1585647>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 22 ... 26

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-0,50BU AU - Crimp contact

1674859

<https://www.phoenixcontact.com/us/products/1674859>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

CK2,5-ED-1,00BU AU - Crimp contact

1674833

<https://www.phoenixcontact.com/us/products/1674833>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.75 mm² ... 1 mm², AWG 18

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-1,50BU AU - Crimp contact

1674820

<https://www.phoenixcontact.com/us/products/1674820>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

CK2,5-ED-2,50BU AU - Crimp contact

1674862

<https://www.phoenixcontact.com/us/products/1674862>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-4,00BU AU - Crimp contact

1674846

<https://www.phoenixcontact.com/us/products/1674846>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 4 mm² ... 4 mm², AWG 12

CK2,5-ED-0,37F AU - Crimp contact

1273567

<https://www.phoenixcontact.com/us/products/1273567>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 22 ... 26

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-0,50F AU - Crimp contact

1273564

<https://www.phoenixcontact.com/us/products/1273564>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

CK2,5-ED-1,00F AU - Crimp contact

1271379

<https://www.phoenixcontact.com/us/products/1271379>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-1,50F AU - Crimp contact

1271375

<https://www.phoenixcontact.com/us/products/1271375>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

CK2,5-ED-2,50F AU - Crimp contact

1271376

<https://www.phoenixcontact.com/us/products/1271376>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



CK2,5-ED-4,00F AU - Crimp contact

1271372

<https://www.phoenixcontact.com/us/products/1271372>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 4 mm² ... 4 mm², AWG 12

HC-COM- 8-ESTC - Contact insert

1408481

<https://www.phoenixcontact.com/us/products/1408481>



Contact insert, number of positions: 8+PE, size: COM, power contacts: 8, control contacts: 0, number of connections per position: 1, Pin, Crimp connection, 500 V, 16 A, 0.5 mm² ... 4 mm², application: Power, Only suitable for plastic housings

HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



UNIFOX MT-CK 1.6/2.5 - Assembly tool

1089092

<https://www.phoenixcontact.com/us/products/1089092>

Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections



UNIFOX RT-CK 2.5 - Contact removal tool

1072067

<https://www.phoenixcontact.com/us/products/1072067>

Contact removal tool, for turned CK 2,5... contacts



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com